


1. 平行轴斜齿轮减速机（P系列）特点：
Parallel shaft helical geared motor (P series) features:

P系列减速机，结合国际技术要求制造，具有很高的科技含量，节省空间，可靠耐用，承受过载能力高，功率可达200KW以上，能耗低，性能优越，减速机效率高达95%以上，振动小，噪音低，节能高，选用优质锻钢材料，钢性铸铁箱体，齿轮表面经过高频热处理，经过精密加工，确保轴平行度和定位的精度，这一切构成了齿轮传动总成的减速机配置了各种类电机，形成了机电一体化，完全保证了产品使用质量特性。


P series parallel shaft helical geared motor are completely new design and new concepts of manufacture.The whole series have higher science and technology contents,small volume,higher reliability,Power can be reached 200KW, Lower energy consume,superiority performance,the gear unit efficiency can up to 95%,the sturdy gear housings are manufactured of high grade cast-iron and dampen vibrations;inhale noise,Gears are made of high-grade alloy steel, pass carburization, quenching and finishing and the hardness of gear surface is reach to 58HRC~62HRC (The precision of gear surface can be reach to 6 stages).So can ensure long-lift of the gear unit.The gear unit can be equip with various motors with brake and without brake,Form the integrated of the electromechanics transmission device.

2. P系列 平行轴斜齿轮减速机形式代号：
P series Parallel shaft helical geared motor type designation:

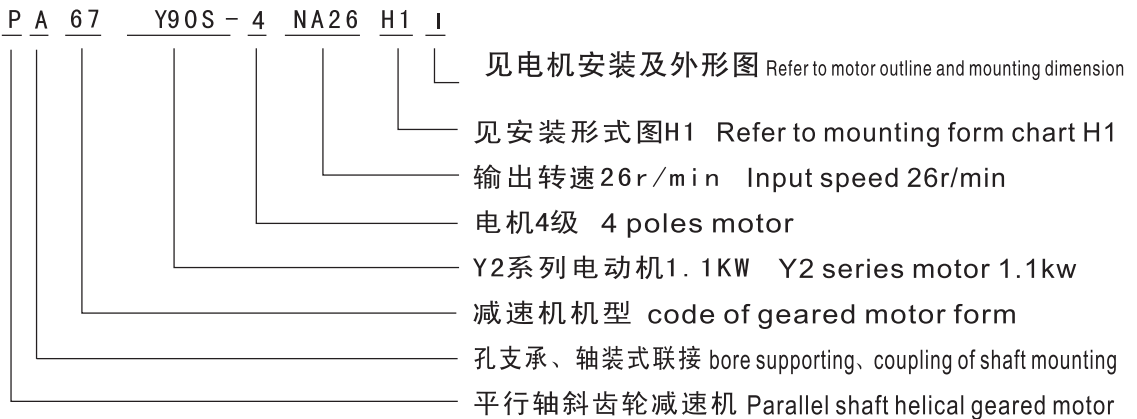

3. 联接代号及形式：
Coupling of code and form:

P—轴伸式联接、底脚安装 P-coupling of shaft shretched、foot mounting	PA—轴装式联接 PA-coupling of shaft mounting
PF—法兰安装、轴伸式联接 PF—Flange mounting、coupling of shaft stretched	PAF—法兰安装、轴装式联接 PAF—Flange mounting、coupling of shaft mounting
PA/T—反力矩安装、轴装式联接 PA/T—Torque-arm mounting、coupled of shaft mounting	PH—锁紧盘安装、轴装式联接 PH-shrink disk mounting、coupled of shaft mounting

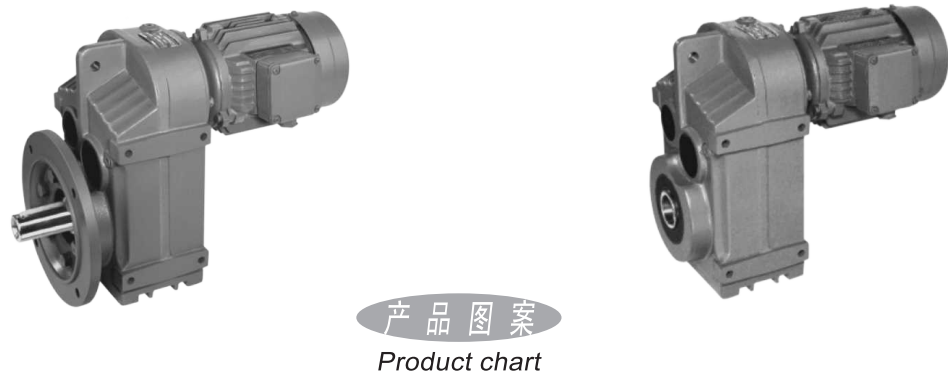

安装形式
Mounting position

P系列减速机型号选择:

P series geared motor select type:

1. 选型时要首先确定使用系数fB, 可以通过下面的计算公式参照每天的工作时间总和: 每小时的开/关次数; 由重力加速度计算出的负载等级等几项参数计算fB。

At first confirm service factor fB when select type,through the calculate formula as below and refer to daily total operating period :times of startup/hour;Calculate fB in such several parameters as the grade of load that is worked out by the acceleration of gravity ,etc

2. 载荷分类: I. 均匀负载: 允许惯性加速参数 ≤ 0.2
II. 中等冲击载荷: 允许惯性加速参数 ≤ 3
III. 重冲击载荷: 允许惯性加速参数 ≤ 10





$$\text{惯性加速参数} = \frac{\text{负载惯量}}{\text{驱动电机惯量}}$$

- Load classification: I. Uniform load:Permissible inertial accelerate parameter ≤ 0.2
II.Moderate shock load:Permissible inertial accelerate parameter ≤ 3
III.Heavy shock load:Permissible inertia accelerate parameter ≤ 10

$$\text{Inertia accelerate parameter} = \frac{\text{Load inertia}}{\text{Drive motor inertia}}$$

3. 例: 负载等级I, 启动次数200次/天, 运行时间24小时/天, fB=1.35, 由图示所得出的使用系数应该与由速度/功率选型表所列出的使用系数相比较, 为了确保使用寿命, 选择的使用系数应该等于或略高于图示计算出的使用系数, 表中所列最大扭矩以 $M_{max}fB=1$ 为标准, 输出扭矩和使用系数不能超过 M_{max} 。

Example:Load grade I,Number of startup 200 times per day.Operating period 24 hour per day,fB=1.35, Refer to the chart as belows and educible service factor which the speed/power of selection table listed service factor is compared,In order to insure service-life,select service factor should be equal to or hyper-work out service factor from the chart,The listed biggest torque is with $M_{max}fB=1$ standard in the form,Output torque and service factor unable to exceed M_{max} .

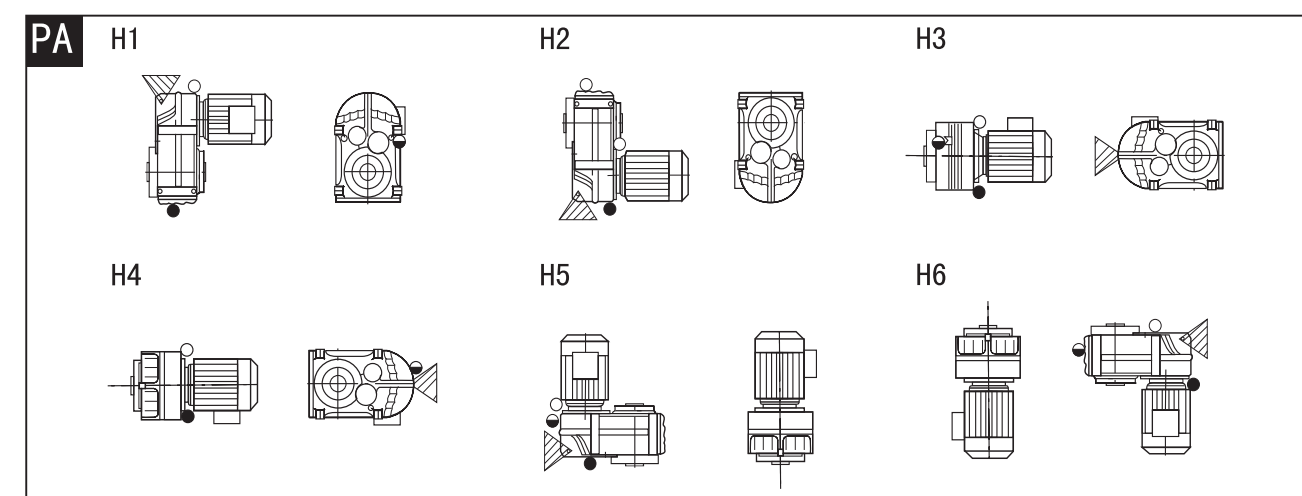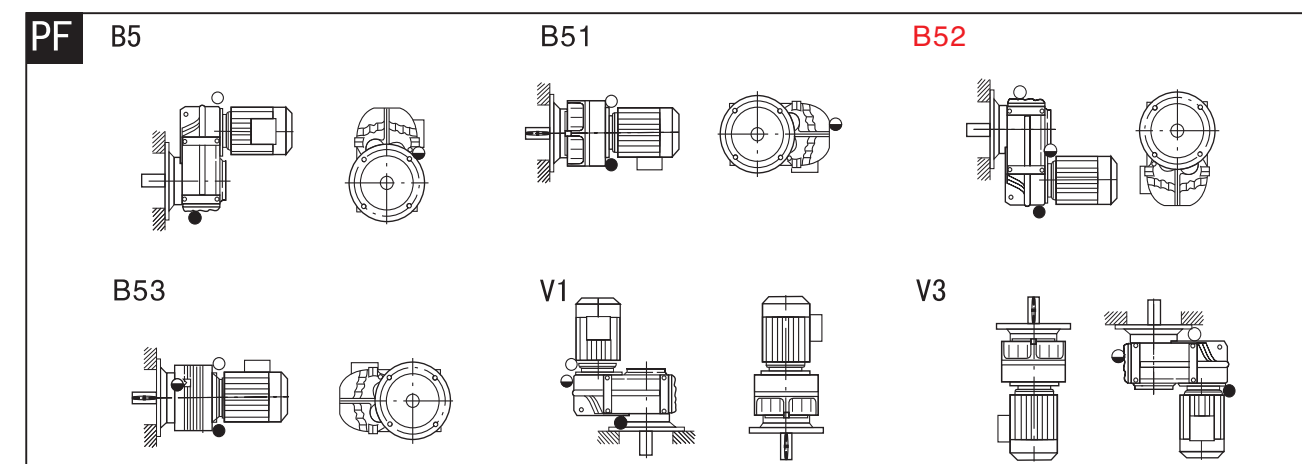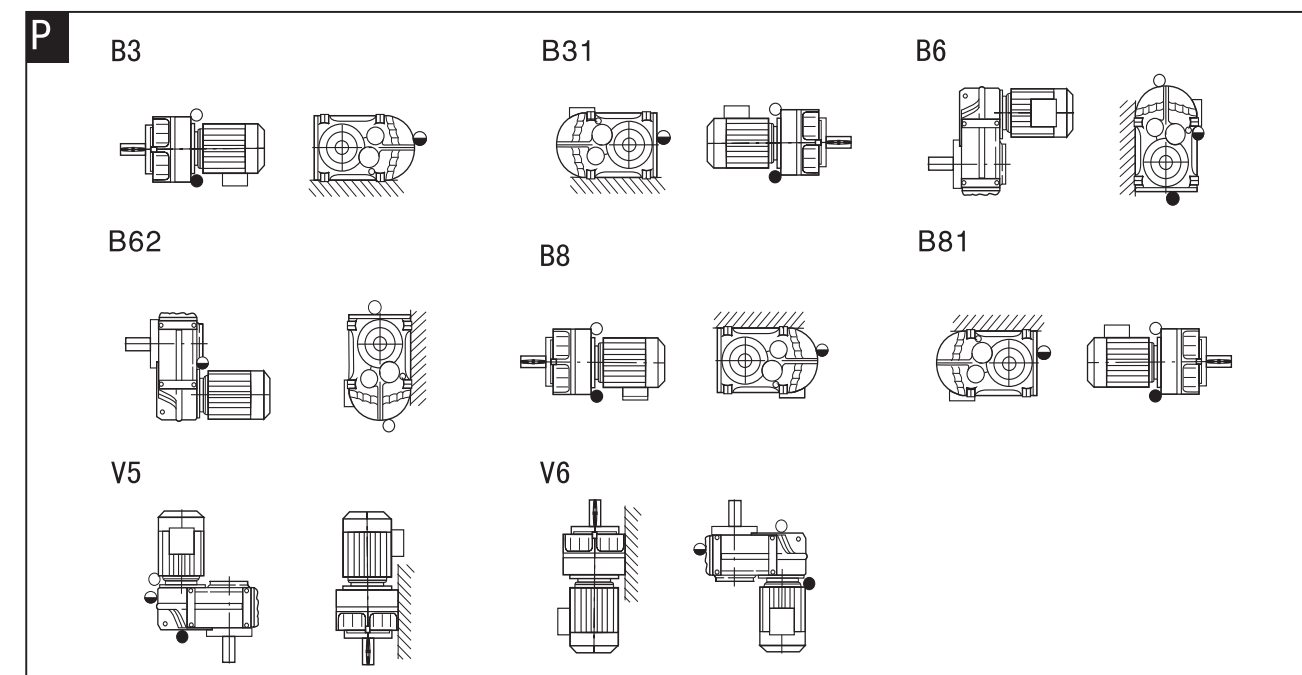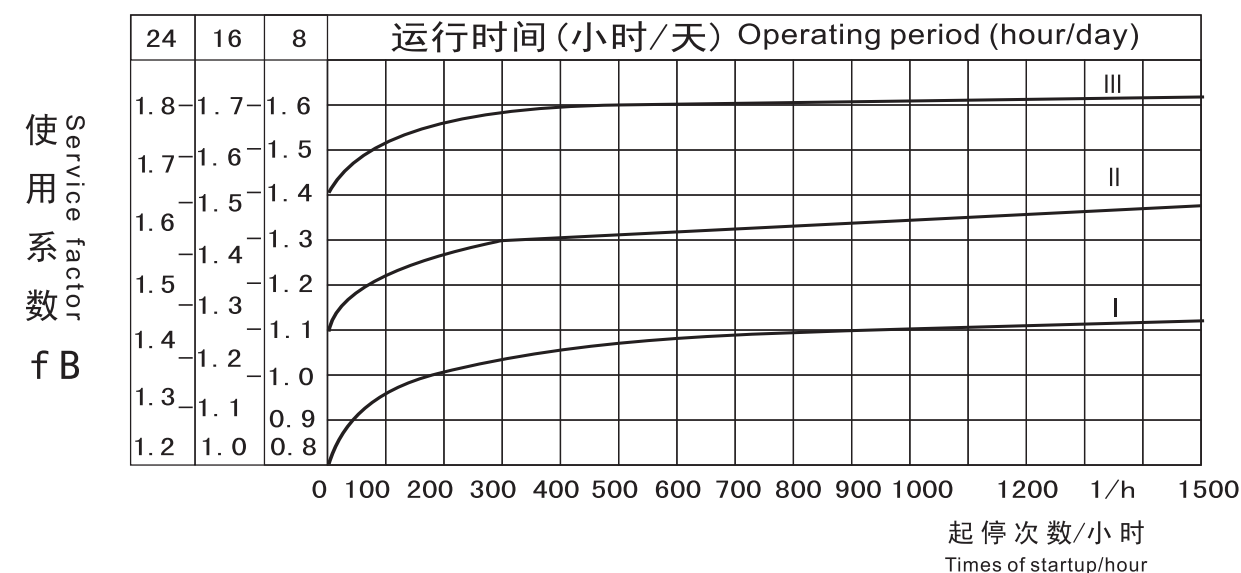

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号	
P _m	n _a	i	M _a			P _m	n _a	i	M _a			
KW	r/min		Nm	fB		KW	r/min		Nm	fB		
0.12	0.06	22323	13500	0.80		0.12	0.80	1728	1130	1.35		
	0.07	19048	11340	0.95	PA 127D77Y631-4		0.89	1544	1040	1.45		
	0.08	16656	10800	1.10	PAF127D77Y631-4		1.0	1354	910	1.65	PA 77D37Y631-4	
	0.09	14722	9870	1.20	P 127D77Y631-4		1.1	1200	810	1.85	PAF 77D37Y631-4	
	0.11	12912	7980	1.50	PF 127D77Y631-4		1.3	1053	710	2.10	P 77D37Y631-4	
	0.12	11656	7090	1.70			1.5	910	605	2.25	PF 77D37Y631-4	
	0.14	10191	6300	1.90			1.7	810	510	2.60		
0.12	0.09	14767	8630	0.80		0.12	0.97	1429	830	0.90		
	0.12	11348	7610	1.00			1.1	1271	830	1.00		
	0.14	10039	5890	1.30			1.2	1102	700	1.15		
	0.16	8548	4880	1.55	PA 107D77Y631-4		1.4	970	615	1.35	PA 67D37Y631-4	
	0.18	7674	4740	1.60	PAF107D77Y631-4		1.6	858	540	1.50	PAF 67D37Y631-4	
	0.20	6767	4120	1.85	P 107D77Y631-4		1.8	755	475	1.75	P 67D37Y631-4	
	0.23	5954	3530	2.20	PF 107D77Y631-4		2.2	641	405	2.00	PF 67D37Y631-4	
	0.26	5223	3070	2.25			2.4	572	375	2.20		
	0.30	4567	2890	2.40			2.7	509	320	2.30		
	0.39	3521	2140	3.30			3.2	437	275	2.70		
0.12	0.19	7328	4320	0.90		0.12	1.4	967	590	0.90		
	0.21	6469	4040	1.05			1.6	851	585	1.05		
	0.25	5615	3680	1.15	PA 97D57Y631-4		1.9	738	500	1.20		
	0.28	4961	3200	1.35	PAF 97D57Y631-4		2.1	646	435	1.40		
	0.32	4333	2800	1.55	P 97D57Y631-4		2.5	558	370	1.60	PA 57D37Y631-4	
	0.35	3906	2550	1.70	PF 97D57Y631-4		2.7	506	330	1.80	PAF 57D37Y631-4	
	0.41	3352	2210	1.95			3.0	452	285	2.10	P 57D37Y631-4	
	0.47	2907	1820	2.40			3.2	426	295	2.00	PF 57D37Y631-4	
	0.54	2553	1670	2.30			3.6	382	260	2.30		
	0.12	0.28	4954	2930	0.90			0.12	4.2	330	225	2.40
0.33		4245	2690	1.10		4.6	298		200	2.70		
0.37		3721	2200	1.35		5.3	262		177	3.10		
0.43		3244	2140	1.40		0.12	2.2		622	380	0.95	
0.48		2881	1900	1.60	PA 87D57Y631-4		2.5		543	370	1.10	
0.54		2576	1700	1.75	PAF 87D57Y631-4		2.6		524	365	1.10	
0.63		2199	1440	2.10	P 87D57Y631-4		2.8		489	340	1.20	PA 47D17Y631-4
0.72		1930	1240	2.40	PF 87D57Y631-4		2.9		475	320	1.25	PAF 47D17Y631-4
0.81		1709	1120	2.40			3.2		427	290	1.35	P 47D17Y631-4
0.92		1493	980	2.70			3.3		419	280	1.45	PF 47D17Y631-4
1.1		1300	785	3.40			3.6		381	260	1.55	
1.2		1148	710	3.80			4.1		334	225	1.75	
0.12	0.53	2613	1580	0.85	PA 77D37Y631-4		4.7	295	198	2.00		
	0.60	2284	1520	1.00	PAF 77D37Y631-4	5.4	253	166	2.40			
	0.68	2029	1340	1.10	P 77D37Y631-4	0.12	4.3	322	190	0.95	PA 37D17Y631-4	
					PF 77D37Y631-4		5.0	278	184	1.10	PAF 37D17Y631-4	
					5.7	242	157	1.30	P 37D17Y631-4			
					6.2	221	149	1.35	PF 37D17Y631-4			

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.12	4.2	326	200	0.90		0.12	228	6.04	5.00	24.0	PA 37Y631-4
	4.8	285	195	1.05	PA 37D17Y631-4		265	5.29	4.30	26.0	PAF 37Y631-4
	5.5	250	170	1.20	PAF 37D17Y631-4		282	4.66	4.1	26.0	P 37Y631-4
	6.3	219	150	1.35	P 37D17Y631-4		327	4.12	3.50	28.0	PF 37Y631-4
	7.4	186	127	1.60	PF 37D17Y631-4	0.18	0.10	12912	12150	0.90	
	8.3	167	114	1.75			0.11	11656	12100	1.00	PA 127D77Y632-4
0.12	6.9	200	166	3.20	PA 57Y631-4		0.13	10191	10700	1.10	PAF127D77Y632-4
	7.5	182	153	3.50	PAF 57Y631-4		0.15	8831	8980	1.35	P 127D77Y632-4
	8.8	167	130	4.20	P 57Y631-4		0.17	7643	7770	1.55	PF 127D77Y632-4
	11	154	113	4.80	PF 57Y631-4		0.20	6715	7150	1.70	
0.12	7.2	185	158	2.25	PA 47Y631-4	0.18	0.15	8548	7700	0.90	
	7.9	170	146	2.50	PAF 47Y631-4		0.17	7674	7245	0.95	
	9.2	156	125	2.90	P 47Y631-4		0.20	6767	7030	1.10	
	11	134	108	3.30	PF 47Y631-4		0.22	5954	6090	1.25	PA 107D77Y632-4
0.12	11	130	107	1.85			0.25	5223	5310	1.45	PAF107D77Y632-4
	12	119	98	2.00			0.29	4567	4860	1.60	P 107D77Y632-4
	14	102	83	2.40			0.37	3521	3660	2.10	PF 107D77Y632-4
	16	88.4	72	2.50			0.43	3037	3170	2.40	
	17	77.4	67	2.70			0.48	2756	2880	2.40	
	20	72.6	59	3.10			0.56	2369	2470	2.80	
	21	66.3	55	3.20			0.64	2068	2160	3.20	
	24	57.5	48	3.70		0.18	0.30	4333	4200	0.90	
	25	54.2	45	4.00			0.34	3906	4260	1.00	
	27	50.3	43	4.20			0.39	3352	3670	1.15	
	29	47.3	39	4.60			0.45	2907	3100	1.40	PA 97D57Y632-4
	31	41.9	36	5.00	PA 37Y631-4		0.52	2553	2790	1.55	PAF 97D57Y632-4
	36	37.3	32	5.70	PAF 37Y631-4		0.59	2245	2450	1.75	P 97D57Y632-4
	38	35.2	30	6.00	P 37Y631-4		0.67	1970	2130	2.00	PF 97D57Y632-4
	44	32.2	26	6.80	PF 37Y631-4		0.77	1722	1890	2.30	
	49	28.2	23	7.70			0.86	1527	1670	2.30	
	58	24.8	20	9.00			0.99	1327	1380	2.80	
0.12	67	21.3	17	11.0			1.1	1171	1280	3.00	
	72	19.0	16	12.0		0.18	0.46	2881	2840	0.95	
	81	18.7	14	13.0			0.51	2576	2820	1.05	PA 87D57Y632-4
	87	16.4	13	13.5			0.60	2199	2400	1.25	PAF 87D57Y632-4
	96	14.6	12	15.3			0.68	1930	2080	1.45	P 87D57Y632-4
	107	13.0	11	17.0			0.77	1709	1860	1.60	PF 87D57Y632-4
	118	11.9	9.2	19.0			0.88	1493	1640	1.85	
	132	10.4	8.7	19.0			1.0	1300	1350	2.20	
	154	9.14	7.4	22.0							
	186	7.43	6.2	21.0							
	205	6.63	5.60	22.5							

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
0.18	1.1	1148	1210	2. 25	PA 87D57Y632-4
	1.3	1010	1050	2. 60	PAF 87D57Y632-4
	1.5	887	940	2. 90	P 87D57Y632-4
	1.7	780	810	3. 30	PF 87D57Y632-4
0.18	0.76	1728	1690	0. 80	
	0.86	1544	1540	0. 90	
	0.98	1354	1500	1. 00	
	1.1	1200	1330	1. 15	PA 77D37Y632-4
	1.2	1053	1170	1. 30	PAF 77D37Y632-4
	1.5	910	1000	1. 50	P 77D37Y632-4
	1.60	810	860	1. 75	PF 77D37Y632-4
	1.9	710	755	2. 00	
	2.2	615	670	2. 20	
	1.5	858	830	0. 90	
0.18	1.8	755	800	1. 00	
	2.1	641	685	1. 20	
	2.3	572	625	1. 30	
	2.6	509	540	1. 50	PA 67D37Y632-4
	3.0	437	470	1. 75	PAF 67D37Y632-4
	3.4	384	420	1. 95	P 67D37Y632-4
	4.0	333	370	2. 20	PF 67D37Y632-4
	4.4	297	325	2. 25	
	5.1	261	285	2. 60	
	5.6	238	260	2. 90	
0.18	6.6	200	215	3. 40	
	2.4	558	615	1. 00	
	2.6	506	550	1. 10	
	2.9	452	485	1. 25	
	3.1	426	485	1. 25	
	3.4	386	415	1. 45	PA 57D37Y632-4
	3.5	382	430	1. 40	PAF 57D37Y632-4
	3.9	338	360	1. 65	P 57D37Y632-4
	4.0	330	370	1. 60	PF 57D37Y632-4
	4.4	298	335	1. 80	
0.18	5.0	262	295	2. 00	
	5.8	226	250	2. 40	
	6.6	200	215	2. 50	

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
0.18	37	35.2	47	4. 00	
	42	32.2	41	4. 40	
	47	28.2	37	5. 00	
	55	24.8	31	5. 80	
	56	24.1	31	6. 00	
	64	21.3	27	6. 80	
	69	19.0	25	7. 20	
	78	18.7	22	8. 10	PA 37Y632-4
	83	16.4	21	8. 70	PAF 37Y632-4
	92	14.6	19	10. 0	P 37Y632-4
0.25	103	13.0	17	11. 0	PF 37Y632-4
	118	11.9	14	12. 0	
	127	10.4	14	13. 0	
	147	9.14	12	13. 5	
	178	7.43	9. 7	13. 5	
	196	6.63	8. 8	14. 0	
	218	6.04	7. 9	15. 0	
	253	5.29	6. 8	16. 0	
	269	4.66	6. 4	17. 0	
	313	4.12	5. 5	18. 0	
0.25	0.15	8831	11970	0. 90	
	0.17	7643	11500	1. 05	PA 127D77Y711-4
	0.19	6715	10400	1. 15	PAF127D77Y711-4
	0.22	5925	9190	1. 30	P 127D77Y711-4
	0.25	5753	7860	1. 55	PF 127D77Y711-4
	0.29	4533	6850	1. 75	
0.25	0.22	5954	8100	0. 85	
	0.25	5223	7860	1. 00	
	0.28	4567	7090	1. 10	PA 107D77Y711-4
	0.37	3521	5370	1. 45	PAF107D77Y711-4
	0.43	3037	4680	1. 65	P 107D77Y711-4
	0.47	2756	4240	1. 80	PF 107D77Y711-4
	0.55	2369	3650	2. 10	
	0.63	2068	3180	2. 40	
	0.81	1597	2440	2. 90	
	0.93	1401	2110	3. 20	
0.25	0.45	2907	4080	0. 95	
	0.51	2553	4050	1. 05	
	0.58	2245	3560	1. 20	PA 97D57Y711-4
	0.66	1970	3100	1. 40	PAF 97D57Y711-4
	0.75	1722	2740	1. 55	P 97D57Y711-4
	0.85	1527	2430	1. 75	PF 97D57Y711-4
	0.98	1327	2040	2. 10	
	1.1	1171	1860	2. 30	
	1.3	1022	1630	2. 30	

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
0.25	0.67	1930	3040	1. 00	
	0.76	1709	2710	1. 10	
	0.87	1493	2380	1. 25	PA 87D57Y711-4
	1.0	1300	1990	1. 50	PAF 87D57Y711-4
	1.1	1148	1780	1. 70	P 87D57Y711-4
	1.3	1010	1550	1. 95	PF 87D57Y711-4
	1.5	887	1370	2. 20	
	1.7	780	1200	2. 25	
	1.9	674	1020	2. 60	
0.25	1.2	1053	1520	0. 90	
	1.4	910	1450	1. 05	
	1.6	810	1260	1. 20	PA 77D37Y711-4
	1.8	710	1110	1. 35	PAF 77D37Y711-4
	2.1	615	970	1. 55	P 77D37Y711-4
	2.4	538	850	1. 75	PF 77D37Y711-4
	2.7	480	760	2. 00	
	3.2	413	645	2. 30	
0.25	2.0	641	900	0. 80	
	2.3	572	820	0. 90	
	2.6	509	795	1. 05	
	3.0	437	685	1. 20	PA 67D37Y711-4
	2.6	500	810	1. 00	PAF 67D37Y711-4
	2.9	454	740	1. 10	P 67D37Y711-4
	3.3	392	635	1. 30	PF 67D37Y711-4
	3.9	333	535	1. 55	
	4.4	297	475	1. 70	
	5.0	261	420	1. 95	
0.25	5.5	238	375	2. 20	
	3.4	386	605	1. 00	
	3.8	338	525	1. 15	
	3.9	330	535	1. 10	PA 57D37Y711-4
	4.4	298	485	1. 25	PAF 57D37Y711-4
	5.0	262	425	1. 40	P 57D37Y711-4
	5.1	255	400	1. 50	PF 57D37Y711-4
	5.8	226	360	1. 65	
	6.5	200	320	1. 90	
	7.7	170	270	2. 20	

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.25	3.1	280	765	1.90	PA 77Y712-6	0.25	54	24.8	44	4.10	
	3.3	261	715	2.00	PAF 77Y712-6		55	24.1	43	4.10	
	3.9	224	615	2.30	PAF 77Y712-6		63	21.3	38	4.80	
	4.4	184	540	2.50	PF 77Y712-6		67	19.0	35	5.10	
	4.7	173	510	2.60			76	18.7	31	5.80	
0.25	5.7	225	420	1.70			82	16.4	29	6.20	
	6.7	195	360	2.00	PA 67Y711-4		91	14.6	26	6.80	PA 37Y711-4
	7.6	182	315	2.30	PAF 67Y711-4		101	13.0	24	7.70	PAF 37Y711-4
	8.0	160	300	2.40	P 67Y711-4		118	11.9	20	8.40	P 37Y711-4
	9.1	145	260	2.80	PF 67Y711-4		125	10.4	19	8.70	PF 37Y711-4
0.25	6.5	200	365	1.65		0.37	145	9.14	17	10.0	
	7.1	182	335	1.80	PA 57Y711-4		175	7.43	14	10.0	
	8.3	167	290	2.10	PAF 57Y711-4		193	6.63	12	10.0	
	8.6	154	250	2.40	P 57Y711-4		215	6.04	11	11.0	
	10	132	235	2.30	PF 57Y711-4		249	5.29	9.6	12.0	
0.25	12	115	200	2.70			265	4.66	9.0	12.0	
	6.8	185	350	1.15			308	4.12	7.7	13.0	
	7.4	170	320	1.25	PA 47Y711-4		0.21	6715	13410	0.80	
	8.7	156	275	1.45	PAF 47Y711-4		0.23	5925	11790	0.90	PA 127D77Y712-4
	10	134	240	1.65	P 47Y711-4		0.27	5153	11300	1.05	PAF127D77Y712-4
0.25	11	117	225	1.80	PF 47Y711-4		0.30	4533	9850	1.20	P 127D77Y712-4
	12	103	193	2.10			0.35	3926	8590	1.40	PF 127D77Y712-4
	15	91.0	164	2.40			0.40	3454	7510	1.60	
0.25	10	130	210	0.85			0.46	3031	6570	1.85	
	11	119	190	0.90		0.37	0.45	3037	6720	1.15	PA 107D77Y712-4
	13	102	184	1.10			0.50	2756	6090	1.25	PAF107D77Y712-4
	15	88.4	159	1.25			0.58	2369	5240	1.45	P 107D77Y712-4
	16	77.4	148	1.35			0.67	2068	4570	1.70	PF 107D77Y712-4
0.25	18	72.6	130	1.55			0.86	1597	3510	2.20	
	20	66.3	121	1.65	PA 37Y711-4	0.37	0.61	2245	4560	0.85	
	22	57.5	107	1.85	PAF 37Y711-4		0.70	1970	3990	0.95	
	24	54.2	100	2.00	P 37Y711-4		0.80	1722	3900	1.10	PA 97D57Y712-4
	25	50.3	95	2.10	PF 37Y711-4		0.90	1527	3460	1.25	PAF97D57Y712-4
0.25	28	47.3	86	2.30			1.0	1327	2930	1.45	P 97D57Y712-4
	30	41.9	81	2.25			1.2	1171	2650	1.60	PF 97D57Y712-4
	34	37.3	70	2.50			1.4	1022	2310	1.85	
	36	35.2	66	2.70			1.5	898	1960	2.20	
	41	32.2	58	3.10							
	46	28.2	52	3.50							

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.37	1.1	1300	2870	1.05		0.37	7.1	195	500	1.45	PA 67Y712-4
	1.2	1148	2550	1.20	PA 87D57Y712-4		8.1	182	435	1.65	PAF67Y712-4
	1.4	1010	2230	1.35	PAF87D57Y712-4		8.5	160	415	1.75	P 67Y712-4
	1.6	887	1970	1.50	P 87D57Y712-4		9.7	145	365	1.95	PF 67Y712-4
	1.8	780	1720	1.75	PF 87D57Y712-4		11	126	310	2.30	
	2.0	674	1470	2.00		0.37	6.9	200	510	1.15	
	2.3	609	1340	2.20			7.5	182	470	1.30	
	2.7	515	1130	2.40			8.8	167	400	1.50	PA 57Y712-4
	3.0	452	1000	2.70			10	154	350	1.70	PAF57Y712-4
0.37	1.7	810	1650	0.85			11	132	325	1.85	P 57Y712-4
	1.9	710	1430	0.95			13	115	280	2.10	PF 57Y712-4
	2.2	615	1390	1.10	PA 77D37Y712-4		15	95.9	240	2.25	
	2.6	538	1210	1.25	PAF77D37Y712-4		17	82.3	215	2.50	
	2.9	480	1080	1.40	P 77D37Y712-4	0.37	9.2	156	385	1.05	
	3.3	413	920	1.65	PF 77D37Y712-4		11	134	335	1.20	PA 47Y712-4
	3.8	367	830	1.80			13	103	270	1.50	PAF47Y712-4
	4.3	323	730	2.00			15	91.0	230	1.75	P 47Y712-4
0.37	3.2	437	880	0.85			17	81.2	205	1.95	PF 47Y712-4
	3.6	384	780	0.95	PA 67D37Y712-4		20	72.8	174	2.30	
	4.1	332	770	1.05	PAF67D37Y712-4		21	64.0	167	2.40	
	4.5	305	685	1.20	P 67D37Y712-4	0.37	16	88.4	220	0.90	
	5.4	257	575	1.40	PF 67D37Y712-4		17	77.4	205	0.95	
	6.0	231	510	1.60			20	72.6	181	1.10	
0.37	5.3	262	605	1.00			21	66.3	169	1.20	
	6.1	226	515	1.15	PA 57D37Y712-4		24	57.5	149	1.35	
	6.9	200	455	1.30	PAF57D37Y712-4		25	54.2	140	1.45	
	8.1	170	385	1.55	P 57D37Y712-4		27	50.3	132	1.50	PA 37Y712-4
	9.1	152	345	1.75	PF 57D37Y712-4		29	47.3	120	1.65	PAF37Y712-4
	10	134	300	2.00			31	41.9	112	1.80	P 37Y712-4
0.37	4.9	280	720	2.00	PA 77Y712-4		36	37.3	98	2.00	PF 37Y712-4
	5.2	261	675	2.20	PAF77Y712-4		38	35.2	92	2.20	
	6.1	224	580	2.30	P 77Y712-4		44	32.2	81	2.30	
	7.0	184	510	2.70	PF 77Y712-4		49	28.2	72	2.50	
	6.0	225	585	1.25	PA 67Y712-4		58	24.8	61	3.00	
0.37					PAF67Y712-4		67	21.3	53	3.50	
					P 67Y712-4		72	19.0	49	3.70	
					PF 67Y712-4						

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.37	81	18.7	44	4.20		0.55	1.2	1171	4060	1.05	
	87	16.4	41	4.40			1.3	1022	3550	1.20	
	96	14.6	37	5.00			1.5	898	3050	1.40	
	107	13.0	33	5.50			1.7	784	2690	1.60	PA 97D57Y801-4
	118	11.9	28	6.00			2.0	690	2340	1.85	PAF97D57Y801-4
	132	10.4	27	6.20	PA 37Y712-4		2.2	605	2060	2.10	P 97D57Y801-4
	154	9.14	23	6.90	PAF37Y712-4		2.6	529	1790	2.40	PF 97D57Y801-4
	186	7.43	19	7.00	P 37Y712-4		2.9	467	1580	2.40	
	205	6.63	17	7.30	PF 37Y712-4		3.4	406	1360	2.90	
	228	6.04	16	8.00			3.7	363	1220	3.20	
	265	5.29	13	8.50		0.55	1.5	887	3040	1.00	
	282	4.66	13	8.60			1.7	780	2660	1.15	PA 87D57Y801-4
	327	4.12	11	9.00			2.0	674	2290	1.30	PAF87D57Y801-4
0.55	0.22	6295	18450	0.90			2.2	609	2080	1.45	P 87D57Y801-4
	0.25	5404	17400	1.05	PA 157D97Y801-4		2.6	515	1750	1.70	PF 87D57Y801-4
	0.49	2780	8930	2.00	PAF157D97Y801-4		3.0	452	1540	1.95	
	0.56	2427	7760	2.30	P 157D97Y801-4		3.9	345	1160	2.30	
	0.81	1674	5520	3.00	PF 157D97Y801-4	0.55	2.5	538	1680	0.80	
	1.0	1308	4220	4.00			2.8	480	1500	0.90	PA 77D37Y801-4
	1.2	1169	3730	4.30			3.3	413	1420	1.05	PAF77D37Y801-4
0.55	0.35	3926	11970	0.90	PA 127D77Y801-4		3.7	367	1270	1.20	P 77D37Y801-4
	0.39	3454	11600	1.05	PAF127D77Y801-4		4.2	323	1120	1.35	PF 77D37Y801-4
	0.45	3031	10200	1.20	P 127D77Y801-4	0.55	5.3	257	800	0.90	PA 67D37Y801-4
					PF 127D77Y801-4		5.9	231	790	1.05	PAF67D37Y801-4
0.55	0.57	2369	7290	0.95			6.6	205	705	1.15	P 67D37Y801-4
	0.66	2068	7070	1.10			7.8	175	600	1.35	PF 67D37Y801-4
	0.74	1826	6110	1.25		0.55	3.3	267	1580	1.70	
	0.85	1597	5440	1.40	PA 107D77Y801-4		3.5	255	1490	1.80	PA 87Y802-6
	0.97	1401	4750	1.60	PAF107D77Y801-4		3.9	226	1340	2.00	PAF87Y802-6
	1.1	1243	4160	1.85	P 107D77Y801-4		4.6	193	1150	2.30	P 87Y802-6
	1.2	1087	3700	2.10	PF 107D77Y801-4		5.0	181	1050	2.60	PF 87Y802-6
	1.4	950	3180	2.40		0.55	4.0	224	1320	1.10	PA 77Y802-6
	1.6	834	2770	2.50							PAF77Y802-6
	2.1	640	2150	3.20							P 77Y802-6
0.55	1.0	1327	4080	0.95	PA 97D57Y801-4						PF 77Y802-6
					PAF97D57Y801-4						
					P 97D57Y801-4						
					PF 97D57Y801-4						

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.55	4.5	184	1160	1.25		0.55	23	57.5	215	0.90	
	4.8	173	1100	1.30	PA 77Y802-6		25	54.2	205	0.95	
	5.4	164	970	1.50	PAF77Y802-6		26	50.3	200	1.00	
	6.3	141	830	1.75	P 77Y802-6		29	47.3	182	1.10	
	7.5	118	760	1.90	PF 77Y802-6		31	41.9	169	1.20	
							36	37.3	148	1.35	
0.55	6.0	224	870	1.65			38	35.2	139	1.45	
	6.9	184	765	1.90			43	32.2	122	1.65	
	7.2	173	730	2.00			48	28.2	109	1.85	
	8.2	164	645	2.30	PA 77Y801-4		57	24.8	92	2.15	PA 37Y801-4
	9.6	141	550	2.60	PAF77Y801-4		58	24.1	91	2.20	PAF37Y801-4
	11	118	505	2.90	P 77Y801-4		66	21.3	79	2.30	P 37Y801-4
	12	108	440	3.30	PF 77Y801-4		71	19.0	74	2.40	PF 37Y801-4
	13	101	420	3.50			80	18.7	66	2.70	
	14	95.1	365	4.00			95	14.6	55	3.30	
0.55	7.0	195	755	0.95			106	13.0	50	3.60	
	8.0	182	660	1.10		0.75	0.50	2780	12300	1.45	
	8.4	160	625	1.15	PA 67Y801-4		0.57	2427	10700	1.70	PA 157D97Y802-4
	9.6	145	550	1.30	PAF67Y801-4		0.82	1674	7580	2.40	PAF157D97Y802-4
	11	126	465	1.55	P 67Y801-4		1.1	1308	5830	2.80	P 157D97Y802-4
	12	110	420	1.70	PF 67Y801-4		1.2	1169	5170	3.20	PF 157D97Y802-4
	14	97.5	370	1.95		0.75	0.46	3031	12420	0.85	
	15	86.9	350	2.10			0.52	2672	11160	0.95	PA 127D77Y802-4
	17	77.8	310	2.30			0.59	2357	10900	1.10	PAF127D77Y802-4
0.55	8.7	167	605	1.00			0.68	2038	9390	1.30	P 127D77Y802-4
	10	154	525	1.15			0.77	1784	8190	1.45	PF 127D77Y802-4
	11	132	490	1.20			0.86	1606	7350	1.65	
	12	115	425	1.40	PA 57Y801-4						
	15	95.9	360	1.65	PAF57Y801-4						
	16	82.3	320	1.85	P 57Y801-4						
	19	75.6	280	2.10	PF 57Y801-4						
0.55	20	71.6	265	2.25							
	23	55.8	230	2.30							
	13	103	405	1.00							
	15	91.0	345	1.15							
	17	81.2	310	1.30	PA 47Y801-4						
	20	72.8	265	1.50	PAF47Y801-4						
	21	64.0	250	1.60	P 47Y801-4						
0.55	24	56.7	220	1.85	PF 47Y801-4						
	28	46.1	185	2.20							
	32	40.4	166	2.40							

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.75	0.76	1826	7530	0.90		0.75	6.1	224	1170	1.25	
	0.86	1597	7400	1.05			7.0	184	1030	1.40	PA 77Y802-4
	0.98	1401	6470	1.20			7.3	173	980	1.50	PAF77Y802-4
	1.1	1243	5690	1.35	PA 107D77Y802-4		8.3	164	860	1.70	P 77Y802-4
	1.3	1087	5040	1.50	PAF107D77Y802-4		9.7	141	740	1.95	PF 77Y802-4
	1.5	950	4350	1.75	P 107D77Y802-4		11	118	675	2.10	
	1.7	834	3800	2.00	PF 107D77Y802-4		12	108	595	2.40	
	2.2	640	2940	2.30			13	101	565	2.60	
	3.2	436	2000	3.40		0.75	8.1	182	801	0.80	
0.75	1.4	1022	4330	0.90			8.5	160	760	0.85	
	1.5	898	4150	1.05			9.7	145	740	0.95	
	1.8	784	3660	1.20	PA 97D57Y802-4		11	126	625	1.15	PA 67Y802-4
	2.0	690	3190	1.35	PAF97D57Y802-4		13	110	565	1.25	PAF67Y802-4
	2.3	605	2800	1.55	P 97D57Y802-4		14	97.5	500	1.45	P 67Y802-4
	2.6	529	2440	1.75	PF 97D57Y802-4		15	86.9	470	1.55	PF 67Y802-4
	3.0	467	2160	2.00			17	77.8	415	1.75	
	3.4	406	1860	2.30		0.75	20	66.2	350	2.00	
	3.8	363	1670	2.30			23	58.6	315	2.30	
0.75	2.0	674	2810	0.95	PA 87D57Y802-4		11	132	590	0.90	
	2.3	669	2830	1.05	PAF87D57Y802-4		13	115	570	1.05	
	2.7	515	2390	1.25	P 87D57Y802-4		15	95.9	485	1.25	PA 57Y802-4
	3.0	452	2100	1.45	PF 87D57Y802-4		17	82.3	435	1.40	PAF57Y802-4
	4.0	345	1590	1.90			19	75.6	380	1.60	P 57Y802-4
0.75	3.8	367	1550	0.85	PA 77D37Y802-4		20	71.6	355	1.70	PF 57Y802-4
	4.3	323	1520	1.00	PAF77D37Y802-4		23	55.8	305	1.95	
	4.9	280	1310	1.15	P 77D37Y802-4 PF 77D37Y802-4	0.75	28	49.8	260	2.30	
0.75	5.1	267	1400	1.90	PA 87Y802-4		31	45.4	230	2.30	
	5.4	255	1330	2.00	PAF87Y802-4		17	81.2	380	0.95	
	6.0	226	1190	2.30	P 87Y802-4 PF 87Y802-4		20	72.8	355	1.15	
0.75	4.5	184	1420	0.90	PA 77Y90S-6		21	64.0	340	1.20	PA 47Y802-4
	4.8	173	1500	0.95	PAF77Y90S-6		24	56.7	295	1.35	PAF 47Y802-4
	5.4	164	1320	1.10	P 77Y90S-6		29	46.1	250	1.60	P 47Y802-4
	6.3	141	1130	1.30	PF 77Y90S-6		32	40.4	220	1.80	PF 47Y802-4
	7.5	118	1040	1.40			38	35.6	190	2.10	
							40	34.4	178	2.20	
							48	28.8	150	2.40	

选型参数表
Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
0.75	29	47.3	220	0.80		1.1	0.79	1784	12000	1.00	PA 127D77Y90S-4
	31	41.9	200	0.90			0.87	1606	10800	1.10	PAF127D77Y90S-4
	36	37.3	199	1.00			1.0	1390	9350	1.30	P 127D77Y90S-4
	38	35.2	186	1.05			1.1	1220	8170	1.45	PF 127D77Y90S-4
	44	32.2	165	1.20			1.3	1077	7260	1.65	
	49	28.2	146	1.35		1.1	1.1	1243	7530	0.90	
	58	24.8	124	1.60			1.3	1087	7370	1.05	PA 107D77Y90S-4
	67	21.3	107	1.85			1.5	950	6390	1.20	PAF107D77Y90S-4
	72	19.0	100	2.00	PA 37Y802-4		1.7	834	5590	1.35	P 107D77Y90S-4
1.1	81	18.7	88	2.30	PAF 37Y802-4		1.9	736	4910	1.55	PF 107D77Y90S-4
	96	14.6	74	2.40	P 37Y802-4	1.1	2.2	640	4310	1.80	
	107	13.0	67	2.70	PF 37Y802-4		2.0	690	4200	0.90	PA 97D57Y90S-4
	118	11.9	58	3.00			2.3	605	4100	1.05	PAF97D57Y90S-4
	132	10.4	54	3.10			2.7	529	3580	1.20	P 97D57Y90S-4
	154	9.14	47	3.50			3.0	467	3160	1.35	PF 97D57Y90S-4
	205	6.63	35	3.60		1.1	3.5	406	2730	1.55	
	228	6.04	31	3.90			3.8	363	2450	1.75	
	265	5.29	27	4.20		1.1	3.1	452	3070	1.00	PA 87D57Y90S-4
1.1	282	4.66	25	4.30			4.1	345	2330	1.30	PAF87D57Y90S-4
	327	4.12	22	4.50			4.7	300	2020	1.50	P 87D57Y90S-4
	366	3.88	20	4.90			5.6	249	1670	1.80	PF 87D57Y90S-4
	0.50	2780	18200	1.00		1.1	2.7	253	3930	1.95	PA 107Y100L2-8
	0.58	2427	16000	1.15			3.2	215	3330	2.30	PAF107Y100L2-8
	0.64	2185	14300	1.25			3.4	198	3120	2.30	P 107Y100L2-8
	0.72	1944	12700	1.40			3.8	172	2760	2.40	PF 107Y100L2-8
	0.84	1674	11200	1.60	PA 157D97Y90S-4	1.1	3.6	253	2890	1.45	PA 97Y90L-6
1.1	1.1	1308	8640	2.10	PAF 157D97Y90S-4		4.1	215	2560	1.65	PAF 97Y90L-6
	1.2	1169	7680	2.30	P 157D97Y90S-4		4.8	186	2170	1.95	P 97Y90L-6
	1.5	953	6190	2.60	PF 157D97Y90S-4		5.3	163	2000	2.10	PF 97Y90L-6
	1.7	845	5450	3.00		1.1					PA 97Y90S-4 PAF97Y90S-4
	3.1	446	2880	5.60			5.5	253	1900	2.20	
	4.6	302	1950	8.30			6.2	215	1680	2.40	P 97Y90S-4 PF 97Y90S-4
1.1	0.69	2038	12420	0.85	PA 127D77Y90S-4	1.1	3.4	267	2800	0.85	PA 87Y90L-6
					PAF127D77Y90S-4		3.6	255	2750	0.95	PAF87Y90L-6
					P 127D77Y90S-4		4.0	226	2610	1.05	P 87Y90L-6
					PF 127D77Y90S-4						PF 87Y90L-6

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
1.1	5.2	267	2030	1.35		1.1	25	56.7	380	0.95	
	5.5	255	1920	1.40	PA 87Y90S-4		29	46.1	360	1.10	
	6.1	226	1720	1.55	PAF87Y90S-4		33	40.4	320	1.25	PA 47Y90S-4
	7.1	193	1480	1.80	P 87Y90S-4		38	35.6	275	1.45	PAF47Y90S-4
	7.8	181	1350	2.00	PF 87Y90S-4		41	34.4	255	1.55	P 47Y90S-4
	8.8	160	1200	2.20			45	30.5	230	1.75	PF 47Y90S-4
	10	139	1010	2.70			48	28.8	215	1.85	
	11	124	930	2.90			54	24.8	193	2.10	
1.1	7.1	184	1490	0.95		1.1	64	21.7	164	2.40	
	7.4	173	1410	1.05			71	19.1	148	2.70	
	8.4	164	1250	1.15	PA 77Y90S-4		44	32.2	240	0.85	
	9.8	141	1070	1.35	PAF77Y90S-4		50	28.2	210	0.95	
	11	118	980	1.50	P 77Y90S-4		59	24.8	179	1.10	
	12	108	860	1.70	PF 77Y90S-4		68	21.3	154	1.30	
	13	101	810	1.80			73	19.0	145	1.40	
	15	95.1	710	2.00			82	18.7	128	1.55	
1.1	16	84.6	640	2.30		1.1	98	14.6	108	1.85	PA 37Y90S-4
	19	79.9	565	2.40			109	13.0	97	2.10	PAF37Y90S-4
	12	126	820	0.85			120	11.9	83	2.30	P 37Y90S-4
	13	110	810	0.90			134	10.4	78	2.40	PF 37Y90S-4
	15	97.5	720	1.00			156	9.14	67	2.60	
	18	77.8	600	1.20	PA 67Y90S-4		175	8.09	60	2.80	
	21	66.2	510	1.40	PAF67Y90S-4		208	6.63	51	2.80	
	23	58.6	460	1.55	P 67Y90S-4		231	6.04	45	3.00	
1.1	26	55.2	405	1.80	PF 67Y90S-4	1.5	269	5.29	39	3.20	
	28	52.2	380	1.90			286	4.66	37	3.30	
	32	43.6	325	2.20			332	4.12	32	3.50	
	36	41.0	295	2.40			372	3.88	28	3.70	
	41	36.4	255	2.70			0.58	2427	19710	0.80	
	17	82.3	560	0.95			0.65	2185	17730	0.90	
	19	75.6	550	1.10			0.73	1944	17500	1.05	
	21	71.6	510	1.15	PA 57Y90S-4		0.84	1674	15300	1.20	PA 157D97Y90L-4
1.1	24	55.8	440	1.35	PAF57Y90S-4	1.5	1.1	1308	11900	1.50	PAF157D97Y90L-4
	28	49.8	375	1.60	P 57Y90S-4		1.2	1169	10600	1.70	P 157D97Y90L-4
	31	45.4	335	1.80	PF 57Y90S-4		1.5	953	8540	2.10	PF 157D97Y90L-4
	37	39.7	285	2.10			1.7	845	7530	2.40	
	39	35.0	270	2.20			3.2	446	3980	4.00	
	46	31.0	225	2.30			4.7	302	2690	6.00	

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
1.5	0.88	1606	13320	0.80		1.5	5.2	267	2750	1.00	
	1.0	1390	11520	0.95			5.5	255	2590	1.05	
	1.2	1220	11200	1.05	PA 127D77Y90L-4		6.2	226	2330	1.15	PA 87Y90L-4
	1.3	1077	9910	1.20	PAF127D77Y90L-4		7.2	193	2000	1.35	PAF 87Y90L-4
	1.5	930	8520	1.40	P 127D77Y90L-4		7.8	181	1830	1.50	P 87Y90L-4
	1.7	820	7500	1.60	PF 127D77Y90L-4		8.8	160	1620	1.65	PF 87Y90L-4
	1.9	729	6630	1.80			11	124	1360	2.00	
	2.2	648	5960	2.00			13	111	1110	2.40	
1.5	1.5	950	7857	0.90		1.5	14	98.4	990	2.70	
	1.7	834	7640	1.00			8.5	164	1550	0.85	
	1.9	736	6730	1.15	PA 107D77Y90L-4		9.9	141	1450	1.00	
	2.2	640	5890	1.30	PAF107D77Y90L-4		11	118	1320	1.10	
	2.5	560	5110	1.50	P 107D77Y90L-4		12	108	1160	1.25	
	2.9	489	4460	1.70	PF 107D77Y90L-4		13	101	1100	1.30	
	3.2	436	4010	1.90			15	95.1	960	1.50	
	3.8	370	3400	2.30			16	84.6	870	1.65	PA 77Y90L-4
1.5	2.7	529	4390	0.90	PA 97D57Y90L-4	1.5	18	79.9	760	1.90	PAF 77Y90L-4
	3.0	467	4310	1.00	PAF97D57Y90L-4		19	75.7	735	1.95	P 77Y90L-4
	3.5	406	3730	1.15	P 97D57Y90L-4		21	68.0	675	2.20	PF 77Y90L-4
	3.9	363	3340	1.30	PF 97D57Y90L-4	1.5	24	58.2	595	2.50	
1.5	4.1	345	2860	0.95	PA 87D57Y90L-4		26	54.7	560	2.60	
	4.7	300	2760	1.10	PAF87D57Y90L-4		29	48.4	490	3.00	
	5.7	249	2290	1.30	P 87D57Y90L-4		32	43.2	445	3.30	
1.5	3.6	253	3960	1.80	PA 107Y100L-6		37	40.9	390	3.70	
	4.3	215	3350	2.20	PAF107Y100L-6		39	36.8	370	2.90	
	4.6	198	3100	2.30	P 107Y100L-6		45	29.8	320	3.90	
	5.2	172	2780	2.60	PF 107Y100L-6		16	86.9	830	0.85	
1.5	3.6	253	3950	1.05	PA 97Y100L-6		18	77.8	810	0.90	
	4.1	215	3490	1.20	P 97Y100L-6		21	66.2	685	1.05	
	4.8	186	2960	1.40	PF 97Y100L-6		23	58.6	620	1.15	
	5.3	163	2720	1.55	PAF97Y100L-6		26	55.2	545	1.30	PA 67Y90L-4
1.5	5.6	253	2570	1.65	PAF 97Y90L-4		28	52.2	515	1.40	PAF 67Y90L-4
	6.3	215	2270	1.85	P 97Y90L-4		33	43.6	440	1.65	P 67Y90L-4
	7.4	186	1930	2.20	PF 97Y90L-4		36	41.0	400	1.80	PF 67Y90L-4
	8.1	163	1780	2.40	P A 97Y90L-4		39	38.6	370	1.95	

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
1.5	24	58.8	600	1.00		2.2	2.1	680	9020	2.00	
	28	49.8	510	1.20	PA 57Y90L-4		2.5	576	7610	2.40	PA 157D97Y100L1-4
	32	45.4	455	1.30	PAF 57Y90L-4		3.2	446	5940	2.70	PAF 157D97Y100L1-4
	37	39.7	390	1.55	P 57Y90L-4		4.7	302	4020	4.00	P 157D97Y100L1-4
	39	35.0	365	1.65	PF 57Y90L-4		5.2	273	3630	4.50	PF 157D97Y100L1-4
	47	31.0	305	1.95			6.1	232	3060	5.30	
1.5	33	40.4	435	0.90		2.2	7.2	197	2590	6.20	
	39	35.6	370	1.10			1.3	1077	13140	0.80	
	41	34.4	350	1.15			1.5	930	11340	0.95	
	46	30.5	315	1.30	PA 47Y90L-4		1.7	820	11100	1.10	PA 127D77Y100L1-4
	48	29.6	300	1.35	PAF 47Y90L-4		1.9	727	9830	1.20	PAF 127D77Y100L1-4
	49	28.8	295	1.35	P 47Y90L-4		2.2	648	8810	1.35	P 127D77Y100L1-4
	55	24.8	260	1.55	PF 47Y90L-4		2.6	549	7460	1.60	PF 127D77Y100L1-4
	65	21.7	220	1.80			2.8	495	6720	1.80	
	72	19.1	200	2.00			3.3	428	5810	2.10	
	81	17.6	176	2.30		2.2	2.2	640	7830	0.90	
	86	16.0	166	2.40			2.5	560	7580	1.00	PA 107D77Y100L1-4
	101	13.9	142	2.80			2.9	489	6610	1.15	PAF 107D77Y100L1-4
1.5	69	21.3	210	0.95			3.2	436	5930	1.30	P 107D77Y100L1-4
	73	19.0	196	1.00			3.8	370	5030	1.55	PF 107D77Y100L1-4
	83	18.7	173	1.15			4.2	333	4520	1.70	
	98	14.6	146	1.35		2.2	3.7	253	5690	1.25	PA 107Y112M-6
	110	13.0	131	1.55			4.4	215	4810	1.50	PAF107Y112M-6
	120	11.9	113	1.70	PA 37Y90L-4		4.7	198	4450	1.60	P 107Y112M-6
	135	10.4	106	1.75	PAF 37Y90L-4		5.3	172	3990	1.80	PF 107Y112M-6
	157	9.14	91	1.90	P 37Y90L-4	2.2	5.5	253	3790	1.90	PA 107Y100L1-4
	176	8.09	81	2.10	PF 37Y90L-4		6.6	215	3250	2.20	PAF107Y100L1-4
	209	6.63	69	2.00			7.1	198	2970	2.40	P 107Y100L1-4
	233	6.04	62	2.20			7.9	172	2660	2.50	PF 107Y100L1-4
	271	5.29	53	2.40		2.2	5.6	253	3780	1.10	
	288	4.66	50	2.40			6.3	215	3340	1.25	PA 97Y100L1-4
	334	4.12	43	2.60			7.4	186	2830	1.45	PAF97Y100L1-4
	374	3.88	38	2.70			8.1	163	2610	1.60	P 97Y100L1-4
2.2	0.98	1441	17010	0.95			9.0	154	2330	1.80	PF 97Y100L1-4
	1.1	1308	17600	1.00	PA 157D97Y100L1-4		10	137	2110	2.00	
	1.2	1169	15700	1.15	PAF 157D97Y100L1-4		11	121	1900	2.30	
	1.5	953	12700	1.40	P 157D97Y100L1-4						
	1.7	845	11200	1.60	PF 157D97Y100L1-4						
	1.9	764	10100	1.80							

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
2.2	7.2	193	2940	0.90		2.2	32	45.4	600	0.90	
	7.8	181	2680	1.00			37	39.7	570	1.05	
	8.8	160	2380	1.15			39	35.0	535	1.15	PA 57Y100L1-4
	11	124	2000	1.35			47	31.0	450	1.30	PAF57Y100L1-4
	13	111	1630	1.65	PA 87Y100L1-4		56	24.8	370	1.55	P 57Y100L1-4
	14	98.4	1470	1.85	PAF87Y100L1-4		67	21.7	315	1.90	PF 57Y100L1-4
	16	88.1	1320	2.00	P 87Y100L1-4		74	19.1	285	2.10	
	18	79.3	1150	2.40	PF 87Y100L1-4		84	16.9	250	2.40	
	21	66.5	1030	2.60			89	15.3	235	2.25	
	25	56.0	850	3.20		2.2	55	24.8	385	1.05	
	28	50.1	755	3.60			65	21.7	325	1.20	
2.2	31	45.1	680	3.90			72	19.1	295	1.35	PA 47Y100L1-4
	12	108	1720	0.85			81	17.6	260	1.55	PAF47Y100L1-4
	13	101	1630	0.90			86	16.0	245	1.65	P 47Y100L1-4
	15	95.1	1420	1.00			101	13.9	210	1.90	PF 47Y100L1-4
	16	84.6	1280	1.15			111	12.4	190	2.10	
	19	79.9	1120	1.30	PA 77Y100L1-4		129	10.3	163	2.40	
	21	68.0	990	1.45	PAF77Y100L1-4		157	9.15	134	2.50	
	24	58.2	870	1.65	P 77Y100L1-4	2.2	98	14.6	195	0.95	
	26	54.7	820	1.75	PF 77Y100L1-4		110	13.0	192	1.05	
	29	48.4	720	2.00			120	11.9	165	1.15	
	32	43.2	650	2.20			135	10.4	155	1.20	PA 37Y100L1-4
	39	36.8	545	1.95			157	9.14	134	1.30	PAF37Y100L1-4
	45	29.8	470	2.60			176	8.09	119	1.40	P 37Y100L1-4
	49	27.4	430	3.30			209	6.63	100	1.40	PF 37Y100L1-4
	55	23.7	380	3.80			233	6.04	90	1.50	
2.2	23	58.6	820	0.85			271	5.29	78	1.60	
	26	55.2	800	0.90			288	4.66	73	1.65	
	28	52.2	755	0.95			334	4.12	63	1.75	
	33	43.6	645	1.10	PA 67Y100L1-4		374	3.88	56	1.85	
	36	41.0	585	1.20	PAF67Y100L1-4	3.0	1.2	1169	19530	0.85	
	41	36.4	505	1.35	P 67Y100L1-4		1.5	953	17600	1.00	
	44	32.0	480	1.50	PF 67Y100L1-4		1.7	845	15600	1.15	
	51	28.3	410	1.75			1.8	764	14100	1.30	PA 157D97Y100L2-4
	56	25.2	375	1.90			2.1	680	12500	1.45	PAF157D97Y100L2-4
	64	22.6	330	2.20			2.4	576	10600	1.70	P 157D97Y100L2-4
	67	19.9	315	2.30			3.1	446	8250	2.20	PF 157D97Y100L2-4
	77	19.2	275	2.60			4.6	302	5580	2.90	
							5.1	279	5040	3.20	
							6.1	232	4250	3.80	
							7.1	197	3610	4.50	

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a	f _B		P _m	n _a	i	M _a	f _B	
KW	r/min		Nm			KW	r/min		Nm		
3.0	1.9	757	12240	0.90	PA 127D77Y100L2-4	3.0	16	84.6	1600	0.85	
	2.2	648	12200	1.00	PAF127D77Y100L2-4		19	79.9	1540	0.95	
	2.5	549	10300	1.15	P 127D77Y100L2-4		21	68.0	1360	1.05	
	2.8	495	9270	1.30	PF 127D77Y100L2-4		24	58.2	1190	1.20	
3.0	3.2	436	7350	0.95	PA 107D77Y100L2-4		25	54.7	1130	1.30	PA 77Y100L2-4
	3.8	370	6930	1.10	PAF107D77Y100L2-4		29	48.4	990	1.45	PAF77Y100L2-4
	4.2	330	6240	1.30	P 107D77Y100L2-4		32	43.2	890	1.65	P 77Y100L2-4
	4.8	291	5460	1.40	PF 107D77Y100L2-4		37	40.9	780	1.85	PF 77Y100L2-4
3.0	3.7	253	7750	0.95	PA 107Y132S-6		38	36.8	750	1.45	
	4.4	215	6560	1.10	PAF107Y132S-6		44	29.8	645	1.95	
	4.7	198	6070	1.20	P 107Y132S-6		49	27.4	590	2.40	
	5.3	172	5440	1.30	PF 107Y132S-6		55	23.7	520	2.80	
3.0	5.5	253	5210	1.40	PA 107Y100L2-4	3.0	65	21.3	440	3.30	
	6.5	215	4410	1.65	PAF107Y100L2-4		32	43.6	800	0.80	
	7.0	198	4080	1.75	P 107Y100L2-4		36	41.0	720	0.90	
	7.8	172	3660	1.95	PF 107Y100L2-4		41	36.4	695	1.00	
3.0	8.7	152	3300	2.20			44	32.0	655	1.10	PA 67Y100L2-4
	6.2	215	4200	0.90			51	28.3	560	1.30	PAF67Y100L2-4
	7.4	186	3890	1.10			56	25.2	515	1.40	P 67Y100L2-4
	8.0	163	3580	1.15	PA 97Y100L2-4		63	22.6	450	1.60	PF 67Y100L2-4
3.0	9.0	154	3200	1.30	PAF97Y100L2-4		67	19.9	430	1.70	
	9.9	137	2880	1.45	P 97Y100L2-4		77	19.2	375	1.90	
	11	121	2610	1.60	PF 97Y100L2-4		85	16.2	335	2.10	
	12	108	2310	1.80			97	15.3	295	2.40	
3.0	14	102	2090	2.00		3.0	56	24.8	510	1.15	
	16	91.8	1840	2.30			66	21.7	435	1.40	
	10	139	2750	1.00			73	19.1	390	1.55	PA 57Y100L2-4
	11	124	2520	1.05			83	16.9	345	1.75	PAF57Y100L2-4
3.0	13	111	2240	1.20	PA 87Y100L2-4		88	15.3	325	1.85	P 57Y100L2-4
	14	98.4	2000	1.35	PAF87Y100L2-4		104	13.7	275	2.20	PF 57Y100L2-4
	16	88.1	1800	1.50	P 87Y100L2-4		114	12.2	250	2.40	
	18	79.3	1560	1.75	PF 87Y100L2-4		132	10.1	220	2.50	
3.0	20	66.5	1400	1.95		3.0	71	19.1	405	1.00	
	25	56.0	1160	2.30			81	17.6	355	1.15	PA 47Y100L2-4
	28	50.1	1030	2.50			86	16.0	335	1.20	PAF47Y100L2-4
							100	13.9	285	1.40	P 47Y100L2-4
							111	12.4	260	1.55	PF 47Y100L2-4
							128	10.3	225	1.80	
							156	9.15	183	1.80	

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a	f _B		P _m	n _a	i	M _a	f _B	
KW	r/min		Nm			KW	r/min		Nm		
3.0	120	11.9	200	0.85		4.0	8.1	163	4300	0.90	
	134	10.4	195	0.85			9.1	154	4200	1.00	
	156	9.14	165	0.95	PA 37Y100L2-4		10	137	3780	1.10	
	175	8.09	164	1.05	PAF37Y100L2-4		11	121	3430	1.25	PA 97Y112M-4
	208	6.63	138	1.00	P 37Y100L2-4		13	108	3040	1.40	PAF97Y112M-4
	231	6.04	124	1.10	PF 37Y100L2-4		14	102	2750	1.55	P 97Y112M-4
	269	5.29	107	1.15			15	97.4	2620	1.60	PF 97Y112M-4
	286	4.66	100	1.20			16	91.8	2420	1.75	
	332	4.12	86	1.25			18	77.9	2160	1.95	
	372	3.88	77	1.35			20	68.8	1940	2.20	
4.0	1.7	845	18540	0.85		4.0	22	61.3	1760	2.40	
	1.9	764	16740	0.95			13	111	2950	0.90	
	2.1	680	16600	1.10	PA 157D97Y112M-4		15	98.4	2630	1.05	
	2.5	576	14000	1.30	PAF157D97Y112M-4		16	88.1	2370	1.15	PA 87Y112M-4
	3.2	446	10900	1.65	P 157D97Y112M-4		19	79.3	2050	1.30	PAF87Y112M-4
	4.7	302	7390	2.40	PF 197D97Y112M-4		21	66.5	1840	1.45	P 87Y112M-4
	5.2	273	6670	2.40			25	56.0	1530	1.75	PF 87Y112M-4
	6.1	232	5640	2.90			28	50.1	1350	2.00	
	7.2	197	4780	3.40			31	45.1	1220	2.20	
4.0	2.6	549	12240	0.90	PA 127D77Y112M-4	4.0	21	68.0	1610	0.80	
	2.9	495	12200	1.00	PAF127D77Y112M-4		24	58.2	1500	0.90	
	3.3	428	10600	1.15	P 127D77Y112M-4		26	54.7	1490	1.00	
	3.8	376	9270	1.30	PF 127D77Y112M-4		29	48.4	1300	1.10	
4.0	4.3	333	7410	0.95	PA 107D77Y112M-4		33	43.2	1170	1.25	PA 77Y112M-4
	4.9	291	7190	1.05	PAF107D77Y112M-4		37	40.9	1030	1.40	PAF77Y112M-4
	5.6	255	6310	1.20	P 107D77Y112M-4 PF 107D77Y112M-4		42	32.5	910	1.60	P 77Y112M-4
4.0	4.2	176	9060	1.30	PA 127Y160M1-8		45	29.8	850	1.45	PF 77Y112M-4
	4.7	156	8150	1.45	PAF127Y160M1-8		47	28.9	800	1.80	
	5.7	130	6650	1.80	P 127Y160M1-8 PF 127Y160M1-8		49	27.4	775	1.85	
4.0	5.6	253	6840	1.05			56	23.7	685	2.10	
	6.6	215	5790	1.25			66	21.3	575	2.30	
	7.1	198	5360	1.35	PA 107Y112M-4		72	18.8	530	2.50	
	7.9	172	4810	1.50	PAF107Y112M-4	4.0	52	28.3	735	1.00	
	8.8	152	4340	1.65	P 107Y112M-4		57	25.2	675	1.05	PA 67Y112M-4
	9.7	140	3940	1.85	PF 107Y112M-4		64	22.6	595	1.20	PAF67Y112M-4
	11	124	3500	2.10			68	19.9	560	1.30	P 67Y112M-4
	12	119	3170	2.30			78	19.2	490	1.45	PF 67Y112M-4
	13	112	2730	2.60			86	16.2	445	1.60	
							98	15.3	390	1.85	

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 f _B	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 f _B	型号
4.0	111	13.7	345	2.10		5.5	3.3	428	13050	0.85	PA 127D77Y132S-4
	126	12.1	305	2.40			3.8	376	11430	0.95	PAF127D77Y132S-4
	147	10.2	260	2.80							P 127D77Y132S-4
	156	9.30	245	2.00	PA 67Y112M-4						PF 127D77Y132S-4
	165	8.27	230	2.30	PAF67Y112M-4	5.5	3.3	207	16100	1.10	
	189	7.81	205	2.70	P 67Y112M-4		4.0	182	13200	1.35	
	209	7.40	183	3.10	PF 67Y112M-4		4.4	162	12100	1.50	PA 157Y160M2-8
	239	5.87	160	3.50			5.0	148	10500	1.70	PAF157Y160M2-8
	270	4.95	141	3.70			5.7	131	9260	1.95	P 157Y160M2-8
	305	4.63	125	3.90			6.5	110	8030	2.20	PF 157Y160M2-8
	357	4.14	107	4.10			7.4	99.2	7140	2.25	
							8.3	89.7	6350	2.50	
							9.1	81.6	5800	2.80	
4.0	67	21.7	570	1.05			10	72.4	5050	3.20	
	74	19.1	515	1.15		5.5	4.2	176	12000	0.95	PA 127Y160M2-8
	84	16.9	450	1.35			4.6	156	11400	1.05	PAF127Y160M2-8
	89	15.3	425	1.40			5.7	130	9270	1.30	P 127Y160M2-8
	105	13.7	365	1.65	PA 57Y112M-4		6.2	115	8460	1.40	PF 127Y160M2-8
	116	12.2	330	1.80	PAF57Y112M-4	5.5	6.6	215	7500	0.90	
	133	10.1	285	2.10	P 57Y112M-4		7.2	198	7320	1.00	
	153	9.54	250	1.70	PF 57Y112M-4		8.0	172	6560	1.10	
	173	8.03	220	1.90			8.9	152	5920	1.20	PA 107Y132S-4
	184	7.46	210	2.00			9.8	140	5380	1.35	PAF107Y132S-4
	216	6.68	177	2.40			11	124	4770	1.50	P 107Y132S-4
	237	5.87	161	2.30			12	119	4330	1.65	PF 107Y132S-4
	274	5.21	139	2.70			13	112	3720	1.95	
5.5	2.5	576	17370	0.95			15	98.7	3400	2.10	
	2.8	503	16800	1.05			16	87.9	3250	2.20	
	3.2	446	15000	1.20	PA 157D97Y132S-4		17	83.1	3080	2.30	
	4.1	353	11800	1.55	PAF157D97Y132S-4	5.5	11	121	4300	0.90	P 97Y132S-4
	4.7	302	10100	1.80	P 157D97Y132S-4						PAF 97Y132S-4
	5.2	273	9160	1.95	PF 157D97Y132S-4						P 97Y132S-4
	6.2	232	7750	2.30							PF 97Y132S-4
	7.1	202	6750	2.40							
	7.3	197	6570	2.40							
	3.4	418	12600	0.85							
	3.8	374	11340	0.95	PA 127D87Y132S-4						
	4.6	312	10500	1.15	PAF127D87Y132S-4						
	4.9	293	9840	1.20	P 127D87Y132S-4						
5.5	5.5	259	8680	1.40	PF 127D87Y132S-4						
	6.4	223	7500	1.60							

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 f _B	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 f _B	型号
5.5	13	108	4150	1.00		5.5	65	22.6	810	0.90	
	14	102	3750	1.10			68	19.9	770	0.95	
	15	97.4	3580	1.15			78	19.2	670	1.05	
	16	91.8	3300	1.25	P 97Y132S-4		87	16.2	605	1.20	
	17	86.7	3180	1.30	PAF 97Y132S-4		99	15.3	530	1.35	
	18	77.9	2950	1.40	P 97Y132S-4		112	13.7	470	1.55	
	19	77.6	2780	1.50	PF 97Y132S-4		126	12.1	415	1.75	PA 67Y132S-4
	20	68.8	2660	1.60			148	10.2	355	2.00	PAF67Y132S-4
	22	61.3	2400	1.75			158	9.30	335	1.50	P 67Y132S-4
	25	58.0	2130	1.95			166	8.27	315	1.70	PF 67Y132S-4
5.5	27	52.1	1930	2.20			190	7.81	275	2.20	
	16	88.1	2900	0.85		5.5	211	7.40	250	2.30	
	19	79.3	2810	0.95			240	5.87	220	2.50	
	21	66.5	2510	1.05			272	4.95	193	2.70	
	25	56.0	2080	1.30			307	4.63	171	2.90	
	28	50.1	1850	1.45	PA 87Y132S-4		360	4.14	146	3.00	
	32	45.1	1660	1.60	PAF 87Y132S-4		85	16.9	560	0.95	
	36	39.5	1440	1.80	P 87Y132S-4		90	15.3	585	1.05	
	41	35.4	1290	1.95	PF 87Y132S-4		106	13.7	495	1.20	
	42	31.9	1250	2.00			116	12.2	450	1.35	PA 57Y132S-4
5.5	49	29.3	1070	2.20			134	10.1	390	1.55	PAF 57Y132S-4
	50	28.8	1060	2.30		7.5	175	8.03	300	1.40	P 57Y132S-4
	54	26.4	970	2.80			185	7.46	285	1.50	PF 57Y132S-4
	60	23.1	870	3.10			217	6.68	240	1.75	
	30	48.4	1600	0.80			239	5.87	220	1.90	
	33	43.2	1440	0.90			276	5.21	190	2.20	
	37	40.9	1400	1.05			4.6	312	12870	0.85	PA 127D87Y132M-4
	42	32.5	1240	1.15	PA 77Y132S-4		4.9	293	12150	0.90	PAF 127D87Y132M-4
	48	28.9	1100	1.30	PAF77Y132S-4		5.5	259	11900	1.00	P 127D87Y132M-4
	56	25.9	940	1.55	P 77Y132S-4		6.4	223	10300	1.15	PF 127D87Y132M-4
	67	21.3	785	1.85	PF 77Y132S-4		7.2	198	9080	1.30	
5.5	73	18.8	725	2.00		7.5	3.3	207	19440	0.85	
	82	17.8	645	2.30			4.0	182	17700	1.00	
	91	15.9	575	2.50			4.4	162	16200	1.10	
	102	14.4	515	2.80			5.1	148	14100	1.30	PA 157Y160L-8
	117	12.6	450	2.90			5.8	131	12400	1.45	PAF157Y160L-8
							6.6	110	10800	1.65	P 157Y160L-8
							7.5	99.2	9600	1.85	PF 157Y160L-8
							8.4	89.7	8530	2.10	
							9.2	81.6	7810	2.30	
							11	72.4	6790	2.40	
							12	61.1	5990	2.70	
							14	49.8	5200	3.20	
							15	45.3	4620	3.20	
							18	39.3	3980	4.00	

选型参数表

Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
7.5	4.4	207	16200	1.10		7.5	22	61.3	3280	1.30	
	5.4	182	13300	1.35			25	58.0	2910	1.45	
	5.9	162	12200	1.50			27	52.1	2630	1.60	
	6.8	148	10600	1.70	PA 157Y160M-6		32	44.0	2230	1.90	PA 97Y132M-4
	7.7	131	9340	1.95	PAF157Y160M-6		33	40.6	2170	1.40	PAF97Y132M-4
	8.9	110	8090	2.20	P 157Y160M-6		37	40.2	1950	2.20	P 97Y132M-4
	9.9	99.2	7200	2.25	PF 157Y160M-6		39	36.1	1840	1.65	PF 97Y132M-4
	11	89.7	6400	2.50			42	34.2	1700	2.30	
	12	81.6	5850	2.80			44	32.6	1630	2.60	
	14	72.4	5090	3.20			47	30.7	1520	2.50	
	16	61.1	4500	3.60		7.5	25	56.0	2840	0.95	
	18	49.8	3900	4.20			28	50.1	2520	1.05	
7.5	5.7	130	11600	0.95	PA 127Y160L-8		32	45.1	2270	1.20	
	6.3	115	11400	1.05	PAF 127Y160L-8		36	39.5	1970	1.30	
	7.3	100	9840	1.20	P 127Y160L-8		41	35.4	1760	1.40	PA 87Y132M-4
	8.2	88.9	8690	1.40	PF 127Y160L-8		49	29.3	1460	1.65	PAF87Y132M-4
							50	28.8	1440	1.65	P 87Y132M-4
7.5	5.6	176	11600	0.95	PA 127Y160M-6		54	26.4	1330	2.00	PF 87Y132M-4
	6.2	156	11500	1.05	PAF127Y160M-6		60	23.1	1190	2.30	
	7.7	130	9350	1.30	P 127Y160M-6		67	21.6	1070	2.50	
	8.4	115	8530	1.40	PF 127Y160M-6		74	19.3	970	2.80	
7.5	8.4	176	8560	1.40	PA 127Y132M-4		84	17.4	860	3.20	
	9.3	156	7700	1.55	PAF127Y132M-4	7.5	92	15.5	775	3.50	
	11	130	6280	1.90	P 127Y132M-4 PF 127Y132M-4		42	32.5	1520	0.85	
7.5	8	172	8060	0.80			48	28.9	1500	0.95	
	8.9	152	7500	0.90			56	25.9	1280	1.15	
	9.8	140	7340	1.00			67	21.3	1070	1.35	
	11	124	6510	1.10			73	18.8	990	1.45	
	12	119	5910	1.20	PA 107Y132M-4		82	17.8	880	1.65	
	13	112	5080	1.40	PAF107Y132M-4		91	15.9	785	1.85	
	15	98.7	4630	1.55	P 107Y132M-4		102	14.4	705	2.10	PA 77Y132M-4
	16	87.9	4430	1.60	PF 107Y132M-4		117	12.6	610	2.30	PAF77Y132M-4
	17	83.1	4210	1.70			131	11.3	545	2.25	P 77Y132M-4
	19	74.2	3730	1.95			154	9.25	465	2.30	PF 77Y132M-4
	21	67.5	3390	2.10			173	8.32	415	2.40	
							194	7.29	370	2.60	
7.5	15	97.4	4400	0.85			215	6.54	335	2.90	
	16	91.8	4050	0.95			248	5.89	290	3.30	
	17	86.7	4340	0.95	PA 97Y132M-4		277	5.06	260	3.90	
	18	77.9	4020	1.05	PAF 97Y132M-4		334	4.28	215	4.20	
	19	77.6	3790	1.10	P 97Y132M-4						
	20	68.8	3620	1.15	PF 97Y132M-4						

选型参数表

Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号
11.0	4.8	302	18270	0.90	PA 157D97Y160M-4	11.0	22	61.3	4400	0.90	
	5.3	273	18300	1.00	PAF157D97Y160M-4		25	58.0	4240	1.00	
	6.2	232	15500	1.15	P 157D97Y160M-4		27	52.1	3830	1.10	
	7.1	202	13500	1.35	PF 157D97Y160M-4		32	44.0	3250	1.30	
	7.3	197	13200	1.35			37	40.2	2830	1.50	PA 97Y160M-4
11.0	6.4	223	13500	0.80	PA 127D87Y160M-4		42	34.2	2470	1.70	PAF97Y160M-4
	7.3	198	11970	0.90	PAF127D87Y160M-4		44	32.6	2370	1.75	P 97Y160M-4
	8.7	166	11100	1.10	P 127D87Y160M-4 PF 127D87Y160M-4		47	30.7	2220	1.90	PF 97Y160M-4
							52	26.0	2000	2.10	
11.0	6.6	207	15900	1.15			58	25.4	1820	2.30	
	8.1	182	13000	1.40			65	21.6	1610	2.60	
	8.8	162	11900	1.50		11.0	37	39.5	2870	0.90	
	10	148	10300	1.75	PA 157Y160M-4		41	35.4	2570	0.95	
	12	131	9130	1.95	PAF157Y160M-4		49	29.3	2130	1.15	PA 87Y160M-4
	13	110	7910	2.30	P 157Y160M-4		54	26.4	1930	1.40	PAF87Y160M-4
	15	99.2	7040	2.30	PF 157Y160M-4		61	23.1	1730	1.55	P 87Y160M-4
	17	89.7	6260	2.60			68	21.6	1560	1.75	PF 87Y160M-4
	18	81.6	5720	2.80			75	19.3	1410	1.90	
	21	72.4	4980	3.20			84	17.4	1250	2.20	
							93	15.5	1130	2.40	
11.0	8.4	176	11300	0.95			110	13.8	960	2.80	
	9.4	156	11000	1.05	PA 127Y160M-4	11.0	73	18.8	1440	1.00	
	11	130	9150	1.30	PAF127Y160M-4		82	17.8	1280	1.15	
	13	115	8340	1.45	P 127Y160M-4		92	15.9	1140	1.25	
	15	100	7220	1.65	PF 127Y160M-4		102	14.4	1030	1.40	
	16	88.9	6370	1.90			118	12.6	890	1.50	
	19	79.5	5500	2.20			132	11.3	795	1.55	PA 77Y160M-4
11.0	12	119	7750	0.85			155	9.25	680	1.60	PAF77Y160M-4
	13	112	7400	0.95			174	8.32	605	1.80	P 77Y160M-4
	15	98.7	6750	1.05			195	7.29	540	2.00	PF 77Y160M-4
	17	83.1	6130	1.20	PA 107Y160M-4		217	6.54	485	2.20	
	19	74.2	5440	1.30	PAF107Y160M-4		250	5.89	420	2.30	
	21	67.5	4930	1.45	P 107Y160M-4		279	5.06	375	2.60	
	25	60.8	4240	1.70	PF 107Y160M-4		336	4.28	310	2.90	
	28	53.7	3700	1.95							
	33	45.2	3140	2.30							
	43	35.8	2470	2.80							
	52	26.7	2010	3.60							
	57	23.8	1830	3.90							

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
15.0	6.7	207	19260	0.85		15.0	33	44.0	4360	0.95	
	8.2	182	17500	1.05			38	40.2	3810	1.10	
	9.0	162	16000	1.15			43	34.2	3330	1.25	
	10	148	13900	1.30	PA 157Y160L-4		45	32.6	3190	1.30	
	12	131	12300	1.45	PAF157Y160L-4		48	30.7	2980	1.40	PA 97Y160L-4
	13	110	10600	1.70	P 157Y160L-4		53	26.0	2690	1.55	PAF 97Y160L-4
	15	99.2	9470	1.90	PF 157Y160L-4		59	25.4	2450	1.70	P 97Y160L-4
	17	89.7	8420	2.10			66	21.6	2170	1.95	PF 97Y160L-4
	19	81.6	7700	2.30			73	20.2	1970	2.10	
	21	72.4	6700	2.40			85	17.9	1690	2.30	
	24	61.1	5910	2.70			97	15.1	1480	2.50	
15.0	9.8	100	13200	0.80		15.0	114	13.4	1250	3.10	
	11	88.9	12000	0.95	PA 127Y180L-6		131	11.2	1100	3.30	
	13	79.5	11100	1.10	PAF127Y180L-6	15.0	55	26.4	2600	1.05	
	14	71.5	10300	1.15	P 127Y180L-6		62	23.1	2320	1.15	
	15	64.6	9440	1.25	PF 127Y180L-6		68	21.6	2090	1.30	
15.0	12	130	12300	1.00			76	19.3	1890	1.45	
	13	115	11200	1.05	PA 127Y160L-4		85	17.4	1680	1.60	
	15	100	9710	1.25	PAF127Y160L-4		94	15.5	1520	1.80	PA 87Y160L-4
	17	88.9	8570	1.40	P 127Y160L-4		111	13.8	1290	2.10	PAF 87Y160L-4
	19	79.5	7400	1.60	PF 127Y160L-4		127	11.9	1120	2.40	P 87Y160L-4
	21	71.5	6870	1.75			152	9.57	940	2.90	PF 87Y160L-4
15.0	15	64.6	9440	1.25	PF 127Y180L-6		176	8.09	810	1.85	
	17	88.9	8570	1.40	P 127Y160L-4		199	6.97	720	2.10	
	19	79.5	7400	1.60	PF 127Y160L-4		220	6.24	650	2.30	
	21	71.5	6870	1.75			259	5.91	555	2.50	
	22	67.5	6630	1.10			297	4.57	485	2.90	
	25	60.8	5700	1.25	PA 107Y160L-4		355	4.13	405	3.20	
	29	53.7	4980	1.45	PAF107Y160L-4	18.5	7.2	202	20250	0.80	PA 157D97Y180M-4
	34	45.2	4220	1.70	P 107Y160L-4		7.5	197	19620	0.80	PAF157D97Y180M-4
	39	38.3	3690	1.95	PF 107Y160L-4						P 157D97Y180M-4
	43	35.8	3320	2.40							PF 157D97Y180M-4
	46	31.7	3120	2.30							
	53	26.7	2700	2.60							
	58	23.8	2470	2.90							
	67	22.2	2130	3.30							

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
18.5	8.2	182	19350	0.85		18.5	45	32.6	3920	1.05	
	9.0	162	17730	0.90			53	26.0	3310	1.25	
	10	148	17100	1.05			59	25.4	3010	1.40	PA 97Y180M-4
	12	131	15100	1.20	PA 157Y180M-4		66	21.6	2670	1.60	PAF 97Y180M-4
	14	110	13100	1.40	PAF157Y180M-4		73	20.2	2420	1.75	P 97Y180M-4
	15	99.2	11600	1.55	P 157Y180M-4		85	17.9	2080	2.00	PF 97Y180M-4
	17	89.7	10300	1.75	PF 157Y180M-4		97	15.1	1820	2.30	
	19	81.6	9460	1.90			115	13.4	1540	2.50	
	21	72.4	8230	2.20			131	11.2	1350	2.70	
	24	61.1	7270	2.25		18.5	69	21.6	2570	1.05	
18.5	28	49.8	6300	2.60			76	19.3	2330	1.15	
	13	115	13800	0.85			86	17.4	2060	1.30	
	15	100	11900	1.00			95	15.5	1870	1.45	
	17	88.9	10500	1.15	PA 127Y180M-4		112	13.8	1580	1.70	PA 87Y180M-4
	19	79.5	9090	1.30	PAF127Y180M-4		128	11.9	1380	1.95	PAF 87Y180M-4
	21	71.5	8450	1.40	P 127Y180M-4		153	9.57	1160	2.30	P 87Y180M-4
	23	64.6	7710	1.55	PF 127Y180M-4		177	8.09	1000	1.50	PF 87Y180M-4
	26	52.7	6670	1.80			199	6.97	890	1.70	
	30	47.1	5880	2.00			220	6.24	800	1.85	
	20	74.2	8990	0.80			260	5.91	680	2.20	
18.5	22	67.5	8150	0.90			298	4.57	595	2.30	
	25	60.8	7010	1.05		22.0	356	4.13	495	2.60	
	29	53.7	6120	1.20	PA 107Y180M-4		10	148	18270	0.90	
	34	45.2	5190	1.40	PAF107Y180M-4		12	131	17900	1.00	
	39	38.3	4540	1.60	P 107Y180M-4		14	110	15600	1.15	
	43	35.8	4070	1.65	PF 107Y180M-4		15	99.2	13800	1.30	
	46	31.7	3830	1.90			17	89.7	12300	1.45	PA 157Y180L-4
	53	26.7	3320	2.20			19	81.6	11300	1.60	PAF157Y180L-4
	58	23.8	3030	2.40			21	72.4	9790	1.85	P 157Y180L-4
	67	22.2	2620	2.70			24	61.1	8640	2.10	PF 157Y180L-4
18.5	38	40.2	4300	0.90	PA 97Y180M-4		28	49.8	7490	2.40	
					PAF 97Y180M-4		32	45.3	6660	2.40	
					P 97Y180M-4		37	39.3	5740	2.80	
					PF 97Y180M-4		45	33.5	4670	3.50	

选型参数表

Select type parameter table

功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
22.0	15	100	12800	0.85		30	15	99.2	16920	0.95	
	17	88.9	11300	0.95			17	89.7	16700	1.10	PA 157Y200L-4
	19	79.5	10800	1.10	PA 127Y180L-4		19	81.6	15300	1.20	PAF157Y200L-4
	21	71.5	10000	1.20	PAF127Y180L-4		22	72.4	13300	1.35	P 157Y200L-4
	23	64.6	9160	1.30	P 127Y180L-4		24	61.1	11700	1.55	PF 157Y200L-4
	26	52.7	7930	1.50	PF 127Y180L-4		28	49.8	10200	1.75	
	30	47.1	7000	1.70			32	45.3	9060	2.00	
	35	42.4	6040	2.00			37	39.3	7810	2.30	
22.0	25	60.8	8000	0.85		30	19	79.5	13400	0.80	
	29	53.7	7280	1.00			21	71.5	12400	0.90	
	34	45.2	6170	1.15	PA 107Y180L-4		23	64.6	11300	0.95	
	39	38.3	5390	1.35	PAF107Y180L-4		27	52.7	10800	1.10	
	43	35.8	4850	1.40	P 107Y180L-4		30	47.1	9510	1.25	PA 127Y200L-4
	46	31.7	4560	1.60	PF 107Y180L-4		35	42.4	8210	1.45	PAF127Y200L-4
	53	26.7	3950	1.80			39	38.2	7270	1.65	P 127Y200L-4
	58	23.8	3610	2.00			47	31.2	6110	1.95	PF 127Y200L-4
	67	22.2	3120	2.30			55	27.9	5240	1.60	
	76	19.3	2750	2.60			58	25.1	4930	2.40	
22.0	53	26.0	3940	1.05		30	60	24.6	4790	1.80	
	59	25.4	3570	1.20			69	21.3	4170	2.50	
	66	21.6	3170	1.30	PA 97Y180L-4		78	18.0	3680	2.70	
	73	20.2	2880	1.45	PAF 97Y180L-4	30	34	45.2	7600	0.85	
	85	17.9	2470	1.70	P 97Y180L-4		39	38.3	7330	1.00	
	97	15.1	2160	1.95	PF 97Y180L-4		46	31.7	6200	1.15	
	115	13.4	1830	2.30			53	26.7	5370	1.35	PA 107Y200L-4
	131	11.2	1600	2.40			58	23.8	4900	1.45	PAF107Y200L-4
22.0	69	21.6	3060	0.90			68	22.2	4240	1.70	P 107Y200L-4
	76	19.3	2770	1.00			77	19.3	3740	1.90	PF 107Y200L-4
	86	17.4	2460	1.10			89	17.1	3230	2.20	
	95	15.5	2220	1.20			100	15.3	2860	2.50	
	112	13.8	1880	1.45	PA 87Y180L-4		119	12.0	2400	2.60	
	128	11.9	1640	1.65	PAF 87Y180L-4		148	10.1	1940	3.00	
	153	9.57	1370	1.95	P 87Y180L-4	30	66	21.6	4310	0.95	
	177	8.09	1190	1.25	PF 87Y180L-4		73	20.2	3910	1.05	
	199	6.97	1050	1.40			85	17.9	3360	1.25	PA 97Y200L-4
	220	6.24	950	1.55			98	15.1	2930	1.45	PAF 97Y200L-4
	160	5.91	810	1.85			115	13.4	2490	1.70	P 97Y200L-4
	298	4.57	705	2.10			132	11.2	2180	1.85	PF 97Y200L-4
	356	4.13	590	2.40			162	8.88	1770	1.30	
30.0	14	110	18990	0.85	PA 157Y200L-4		179	7.92	1600	1.45	
					PAF157Y200L-4						
					P 157Y200L-4						
					PF 157Y200L-4						

选型参数表

Select type parameter table


功率	输出转速	速比	输出扭矩	使用系数	型号	功率	输出转速	速比	输出扭矩	使用系数	型号
P _m	n _a	i	M _a			P _m	n _a	i	M _a		
KW	r/min		Nm	fB		KW	r/min		Nm	fB	
30	208	6.63	1380	1.65	PA 97Y200L-4	45	22	72.4	18000	0.90	
	238	5.92	1200	1.85	PAF97Y200L-4		24	61.1	17600	1.00	PA 157Y225M-4
	281	5.02	1020	2.10	P 97Y200L-4		28	49.8	15300	1.20	PAF157Y225M-4
	321	4.52	890	2.20	PF 97Y200L-4		32	45.3	13600	1.30	P 157Y225M-4
							37	39.3	11700	1.55	PF 157Y225M-4
37	17	89.7	18540	0.85		45	37	39.3	11700	1.55	PF 157Y225M-4
	19	81.6	17010	0.95			45	33.5	9510	1.90	
	22	72.4	16400	1.10	PA 157Y225S-4		53	27.5	8070	2.20	
	24	61.1	14500	1.25	PAF157Y225S-4	45	30	47.1	13000	0.85	
	28	49.8	12600	1.45	P 157Y225S-4		35	42.4	11100	0.95	
	32	45.3	11200	1.60	PF 157Y225S-4		39	38.2	10900	1.10	
	37	39.3	9630	1.85			47	31.2	9160	1.30	
	45	33.5	7820	2.30			55	27.9	7850	1.10	
	53	27.5	6630	2.40			58	25.1	7400	1.60	
							60	24.6	7180	1.20	PA 127Y225M-4
37	27	52.7	12000	0.90			69	21.3	6250	1.90	PAF127Y225M-4
	30	47.1	11700	1.00			78	18.0	5520	2.00	P 127Y225M-4
	35	42.4	10100	1.20			90	16.2	4780	2.30	PF 127Y225M-4
	39	38.2	8960	1.35			101	14.7	4250	2.40	
	47	31.2	7530	1.60			117	13.3	3670	2.50	
	55	27.9	6460	1.30			144	10.1	2980	2.90	
	58	25.1	6080	1.95	PA 127Y225S-4		166	8.68	2590	2.40	
	60	24.6	5910	1.45	PAF127Y225S-4		186	7.89	2300	2.30	
	69	21.3	5140	2.30	P 127Y225S-4		216	6.68	1990	3.20	
	78	18.0	4530	2.40	PF 127Y225S-4		266	5.98	1610	3.30	
37	90	16.2	3930	2.50		45	53	26.7	7400	0.90	
	101	14.7	3500	2.90			58	23.8	7350	1.00	
	117	13.3	3010	3.00			68	22.2	6360	1.15	
	144	10.1	2450	3.60			77	19.3	5610	1.30	
	166	8.68	2130	3.00			89	17.1	4850	1.50	PA 107Y225M-4
	186	7.89	1890	2.90			100	15.3	4290	1.70	PAF107Y225M-4
	53	26.7	6630	1.10			119	12.0	3600	1.95	P 107Y225M-4
	58	23.8	6040	1.20			148	10.1	2910	2.20	PF 107Y225M-4
	68	22.2	5230	1.40			152	9.02	2830	1.60	
	77	19.3	4610	1.55	PA 107Y225S-4		176	8.11	2450	1.90	
37	89	17.1	3990	1.80	PAF107Y225S-4	55	199	7.06	2160	2.10	
	100	15.3	3530	2.00	P 107Y225S-4		236	6.29	1820	2.30	
	119	12.0	2960	2.40	PF 107Y225S-4		24	61.1	19350	0.85	
	148	10.1	2390	2.50			28	49.8	16740	0.95	PA 157Y250M-4
	152	9.02	2330	1.95			32	45.3	16500	1.10	PAF157Y250M-4
	176	8.11	2010	2.30			37	39.3	14300	1.25	P 157Y250M-4
	199	7.06	1780	2.50			45	33.5	11600	1.55	PF 157Y250M-4
	236	6.29	1500	2.90			53	27.5	9830	1.85	

选型参数表
Select type parameter table

功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	功率 P _m KW	输出转速 n _a r/min	速比 i	输出扭矩 M _a Nm	使用系数 fB	型号	
55	52	30.3	10200	1.65	PA 157Y250M-4	90	45	33.5	17010	0.95	PA 157Y280M-4	
	58	26.0	9060	1.65	PAF157Y250M-4		52	30.3	16600	1.00		
	67	23.3	7890	2.30	P 157Y250M-4		54	27.5	16000	1.10		
	75	21.0	7040	2.40	PF 157Y250M-4		58	26.0	14800	1.00		
	88	16.5	6000	2.70			67	23.3	12900	1.40		
55	40	38.2	12000	0.90		90	75	21.0	11500	1.50	P 157Y280M-4	
	47	31.2	11200	1.10			88	16.5	9790	1.85	PF 157Y280M-4	
	58	25.1	9010	1.35			106	14.1	8110	2.10		
	69	21.3	7610	1.60			124	12.5	6920	2.30		
	78	18.0	6720	1.65	PA 127Y250M-4		90	58	25.1	13300	0.80	
	90	16.2	5820	1.90	PAF127Y250M-4	69		21.3	12000	0.95		
	101	14.7	5180	2.10	P 127Y250M-4	78		18.0	11000	1.00		
	118	13.3	4470	2.20	PF 127Y250M-4	90		16.2	9500	1.15	PA 127Y280M-4	
	145	10.1	3630	2.30		102		14.7	8450	1.30	PAF127Y280M-4	
	166	8.68	3160	2.20		118		13.3	7280	1.35	P 127Y280M-4	
	187	7.89	2810	2.10		145		10.1	5920	1.60	PF 127Y280M-4	
	217	6.68	2420	2.60		167		8.68	5150	1.35		
	267	5.98	1970	2.70		188		7.89	4580	1.30		
	315	4.84	1670	3.30		218		6.68	3950	1.75		
	75	32	45.3	20250	0.80		268	5.98	3210	1.85		
37		39.3	17460	0.95		316	4.84	2720	2.20			
45		33.5	15800	1.15		110	54	27.5	17550	0.90		
52		30.3	13800	1.25	PA 157Y280S-4		67	23.3	15700	1.15	PA 157Y315S-4	
54		27.5	13400	1.35	PAF157Y280S-4		75	21.0	14000	1.20	PAF157Y315S-4	
58		26.0	12300	1.20	P 157Y280S-4		88	16.5	11900	1.50	P 157Y315S-4	
67		23.3	10700	1.70	PF 157Y280S-4		106	14.1	9880	1.70	PF 157Y315S-4	
75		75	21.0	9570	1.80		125	12.5	8430	1.90		
		88	16.5	8150	2.20		132	67	23.3	16920	0.95	PA 157Y315M-4
		106	14.1	6760	2.25			75	21.0	16800	1.00	PAF157Y315M-4
	124	12.5	5770	2.50		88		16.5	14300	1.25	P 157Y315M-4	
	58	25.1	12200	1.00		106		14.1	11900	1.45	PF 157Y315M-4	
	69	21.3	10300	1.15		125		12.5	10100	1.60		
	75	78	18.0	9130	1.20		160	88	16.5	17300	1.05	PA 157Y315L1-4
		90	16.2	7920	1.40			106	14.1	14400	1.20	PAF157Y315L1-4
		102	14.7	7040	1.55	PA 127Y280S-4		125	12.5	12300	1.30	P 157Y315L1-4 PF 157Y315L1-4
		118	13.3	6070	1.65	PAF127Y280S-4		200	88	16.5	19530	0.85
145		10.1	4930	1.95	P 127Y280S-4	106	14.1		16200	0.95	PAF157Y315L2-4	
167		8.68	4290	1.65	PF 127Y280S-4	125	12.5		15300	1.05	P 157Y315L2-4 PF 157Y315L2-4	
188		7.89	3810	1.55								
218		6.68	3290	2.10								
268		5.98	2670	2.20								
316		4.84	2270	2.70								

P系列外形安装尺寸
PA 37-PA 157轴装

P series outline and mounting dimension
PA 37-PA 157shaft mounting

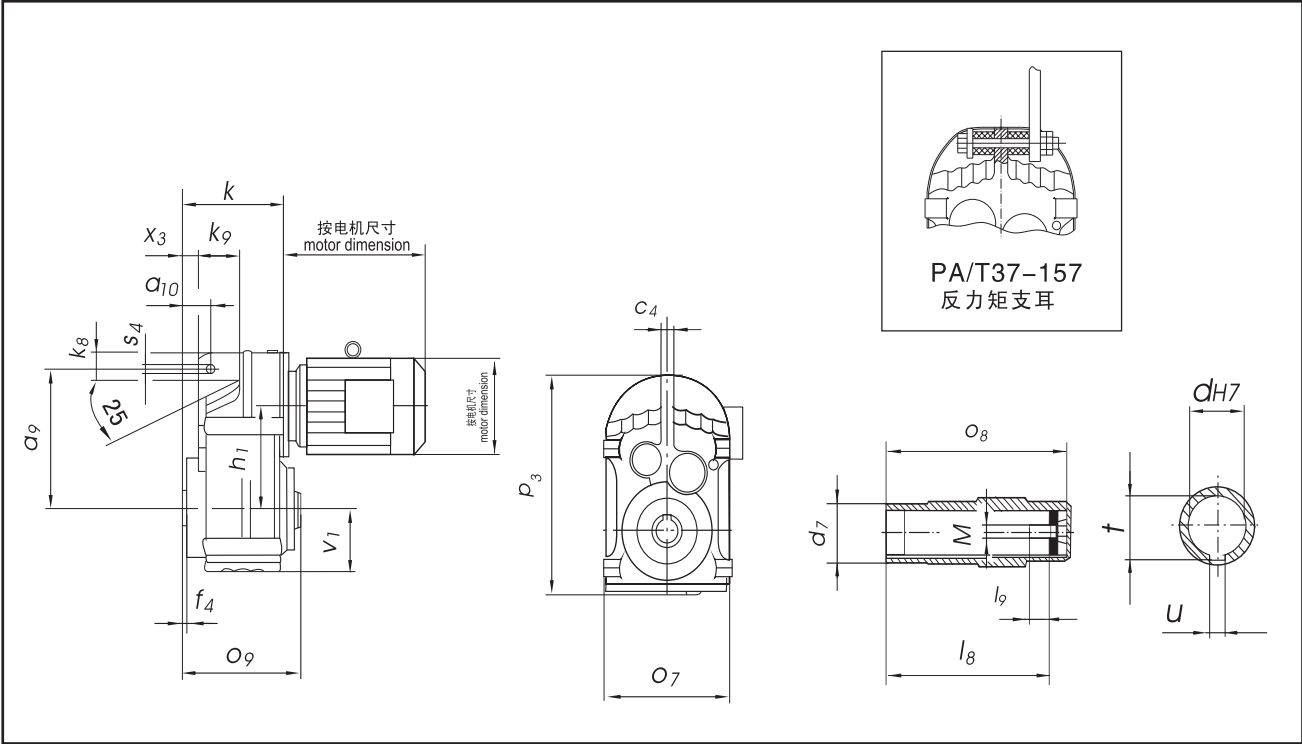


型号 Type	a ₉	a ₁₀	c ₄	f ₄	h ₁	k	k ₈	k ₉	o ₇	o ₈	o ₉	p ₃	s ₄	v ₁	x ₃	d	d ₇	l ₈	l ₉	t	u	M
PA37	158	31.5	12	0.5	112	110	30	46	169	120	123	252	14	76	15	30	45	105	17	33.3	8	M10
PA47	170	32	12	1	128.1	133	22	64	185	150	153	269	14	77	12	35	50	132	22	38.3	10	M12
PA57	198	40.5	14	1	136	150	31	60	210	166	170	317	14	93	19.5	40	55	142	29	43.3	12	M16
PA67	218	41	16	1	159.5	161	40	65	217	180	184	343	14	97	21	40	55	156	29	43.3	12	M16
PA77	278	50	20	1	200	193	49	69	275	210	213	426	22	121	28	50	70	183	32	53.8	14	M16
PA87	346	62	26	1	246.7	224	57	79	336	240	243	531	22	152	32	60	85	210	36	64.4	18	M20
PA97	395	70	30	1	285	274	88	104	405	300	303	623	26	178	34	70	95	270	34	74.9	20	M20
PA107	475	88	36	2.5	332.4	312	108	100	450	350	353	717	26	200	57	90	118	313	40	95.4	25	M24
PA127	550	110	40	2.5	382.6	373	138	125	530	410	413	856	33	236	66	100	135	373	38	106.4	28	M24
PA157	660	150	45	7	447	455	170	140	660	500	503	1021	33	286	98	120	155	460	36	127.4	32	M24

说明：其配件不在供货范围内。 Note: The spare pats are not included in shipment.

P 系列外形安装尺寸
PA37D17-PA157D97轴装


P series outline and mounting dimension
PA37D17-PA157D97 shaft mounting

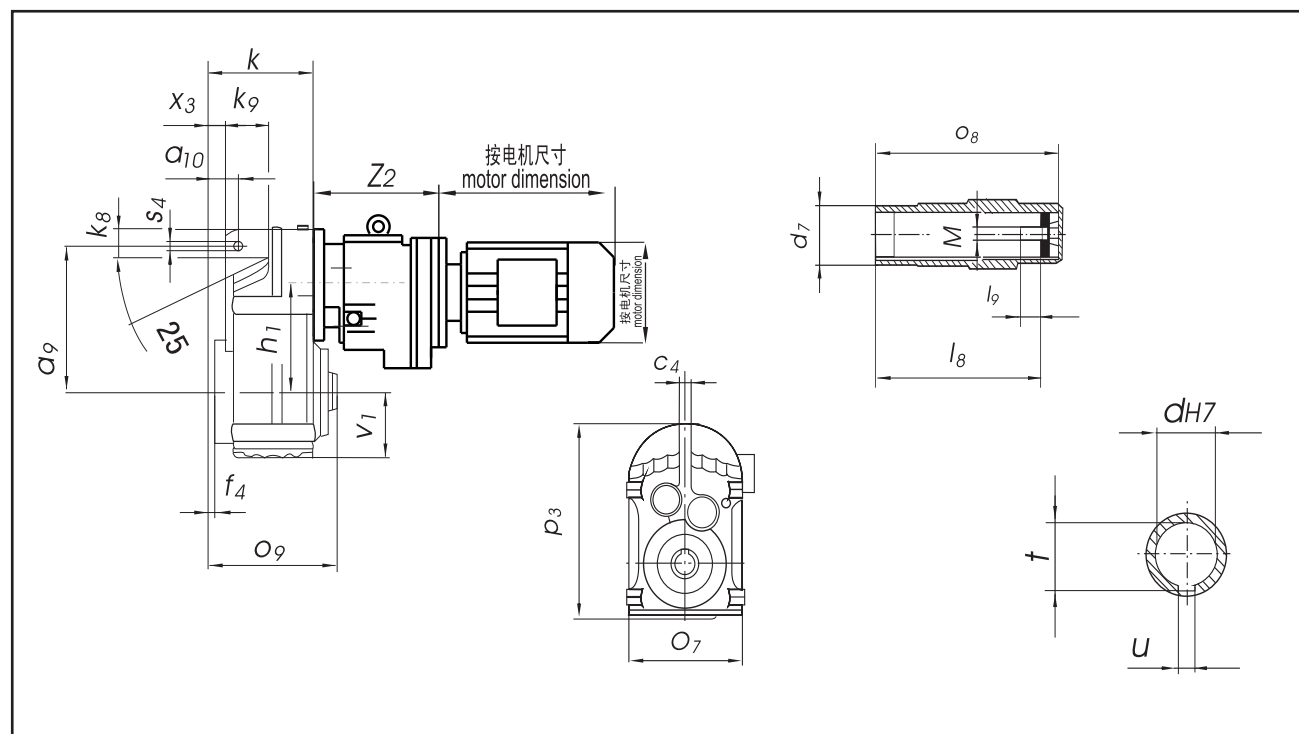

型号 Type	a_9	a_{10}	c_4	f_4	h_1	k	k_8	k_9	o_7	o_8	o_9	p_3	s_4	v_1	x_3	z_2	d	d_7	l_8	l_9	t	u	M
PA37D17	158	31.5	12	0.5	112	110	30	46	169	120	123	252	14	76	15	175	30	45	105	17	33.3	8	M10
PA47D17	170	32	12	1	128.1	133	22	64	185	150	153	269	14	77	12	175	35	50	132	22	38.3	10	M12
PA57D37	198	40.5	14	1	136	150	31	60	210	166	170	317	14	93	19.5	165	40	55	142	29	43.3	12	M16
PA67D37	218	41	16	1	159.5	161	40	65	217	180	184	343	14	97	21	165	40	55	156	29	43.3	12	M16
PA77D37	278	50	20	1	200	193	49	69	275	210	213	426	22	121	28	165	50	70	183	32	53.8	14	M16
PA87D57	346	62	26	1	246.7	224	57	79	336	240	243	531	22	152	32	190	60	85	210	36	64.4	18	M20
PA97D57	395	70	30	1	285	274	88	104	405	300	303	623	26	178	34	190	70	95	270	34	74.9	20	M20
PA107D77	475	88	36	2.5	332.4	312	108	100	450	350	353	717	26	200	57	232	90	118	313	40	95.4	25	M24
PA127D77	550	110	40	2.5	382.6	373	138	125	530	410	413	856	33	237	66	232	100	135	373	38	106.4	28	M24
PA127D87	550	110	40	2.5	382.6	373	138	125	530	410	413	856	33	236	66	280	100	135	373	38	106.4	28	M24
PA157D97	660	150	45	7	447	567	170	140	660	500	503	1021	33	286	98	325	120	155	460	36	127.4	32	M24

P系列外形安装尺寸
PF37-PF157 法兰安装

P series outline and mounting dimension
PF37-PF157 flange mounting

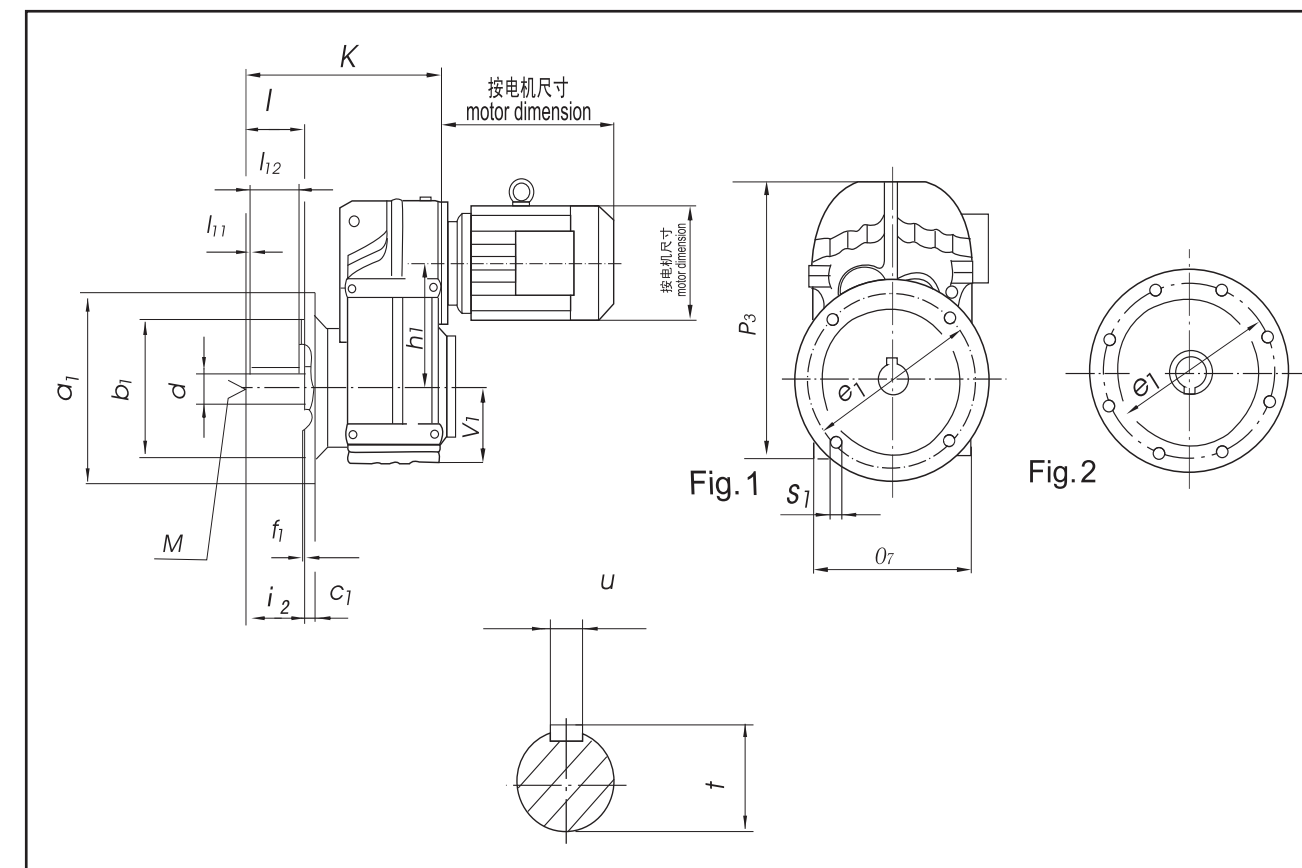


型号 Type	a_1	K	Fig	b_1	c_1	e_1	f_1	i_2	s_1	d	l	l_{11}	l_{12}	t	u	h_1	M	V_1	P_3	O_7
PF37	160	184	1	110	10	130	3.5	50	9	25	50	5	40	28	8	112	M10	76	252	165
PF47	200	218	1	130	12	165	3.5	60	11	30	60	3.5	50	33	8	128.1	M10	77	269	180
PF57	250	243	1	180	15	215	4	70	13.5	35	70	7	56	38	10	136	M12	93	317	200
PF67	250	264	1	180	15	215	4	80	13.5	40	80	5	70	43	12	159.5	M16	97	343	212
PF77	300	330	1	230	16	265	4	100	13.5	50	100	10	80	53.5	14	200	M16	121	426	270
PF87	350	374	1	250	18	300	5	120	17.5	60	120	5	110	64	18	246.7	M20	152	531	330
PF97	450	456	2	350	22	400	5	140	17.5	70	140	7.5	125	74.5	20	285	M20	178	623	400
PF107	450	523	2	350	22	400	5	170	17.5	90	170	5	160	95	25	332.4	M24	200	717	450
PF127	550	634	2	450	25	500	5	210	17.5	110	210	15	180	116	28	382.6	M24	236	856	530
PF157	660	725	2	550	28	600	6	210	22	120	210	5	200	127	32	447	M24	286	1021	660

注: $d \leq 50\text{mm}$ 公差是k6, $d > 50\text{mm}$ 公差是m6
 $b_1 \leq 230\text{mm}$ 公差是j6, $b_1 > 230\text{mm}$ 公差是h6

Note: $d \leq 50\text{mm}$ Tolerance k6, $d > 50\text{mm}$ Tolerance m6
 $b_1 \leq 230\text{mm}$ Tolerance j6, $b_1 > 230\text{mm}$ Tolerance h6


P 系列外形安装尺寸 P series outline and mounting dimension
P37-P157底脚安装 P37-P157 foot mounting

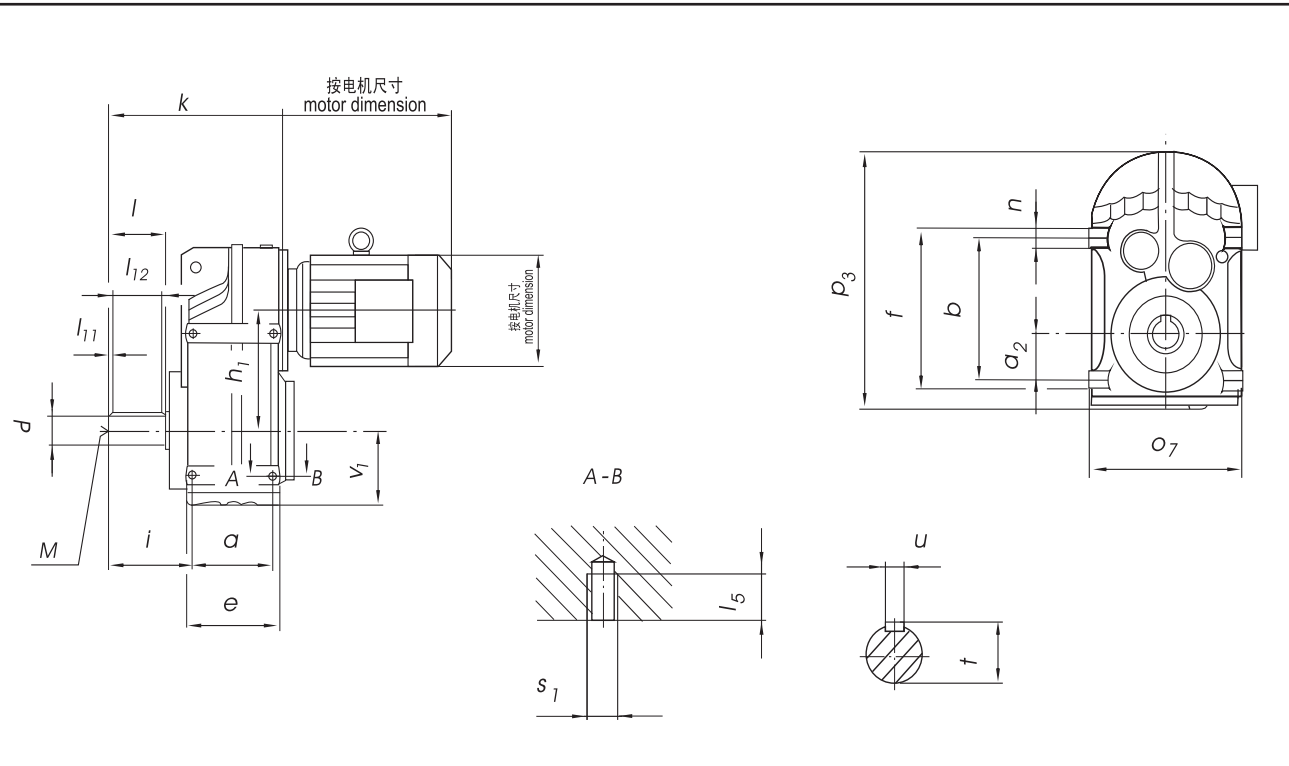

型号 Type	a	a ₂	b	e	f	h ₁	i	k	l ₅	n	o ₇	p ₃	s ₁	v ₁	d	l	l ₁₁	l ₁₂	t	u	M
P37	77	31	115	95	135	112	72.5	160	11	20	165	252	M8	76	25	50	5	40	28	8	M10
P47	93	43	145	109	165	128.1	91	193	15	20	180	269	M10	77	30	60	3.5	50	33	8	M10
P57	102	55	170	126	195	136	104.5	221	17	25	200	317	M12	93	35	70	7	56	38	10	M12
P67	112	60	190	131	215	159.5	118.5	242	17	25	212	343	M12	97	40	80	5	70	43	12	M16
P77	140	70	240	165	275	200	137.5	294	26	35	270	426	M16	121	50	100	10	80	53.5	14	M16
P87	165	100	310	195	350	246.7	163	344	26	40	330	531	M16	152	60	120	5	110	64	18	M20
P97	205	120	350	240	400	285	190.5	416	28	50	400	623	M20	178	70	140	7.5	125	74.5	20	M20
P107	220	125	400	260	460	332.4	241.5	484	36	60	450	717	M24	200	90	170	5	160	95	25	M24
P127	270	142	450	316	520	382.6	291	585	45	70	530	856	M30	236	110	210	15	180	116	28	M24
P157	310	170	540	364	620	447	325	662	55	80	660	1021	M36	286	120	210	5	200	127	32	M24

注: d≤50mm公差是k6, d>50mm公差是m6 Note: d≤50mm Tolerance k6, d>50mm Tolerance m6

P系列外形安装尺寸 P series outline and mounting dimension
PAF37-PAF157 空心轴法兰安装 PAF37-PAF157 hollow shaft and flange mounting

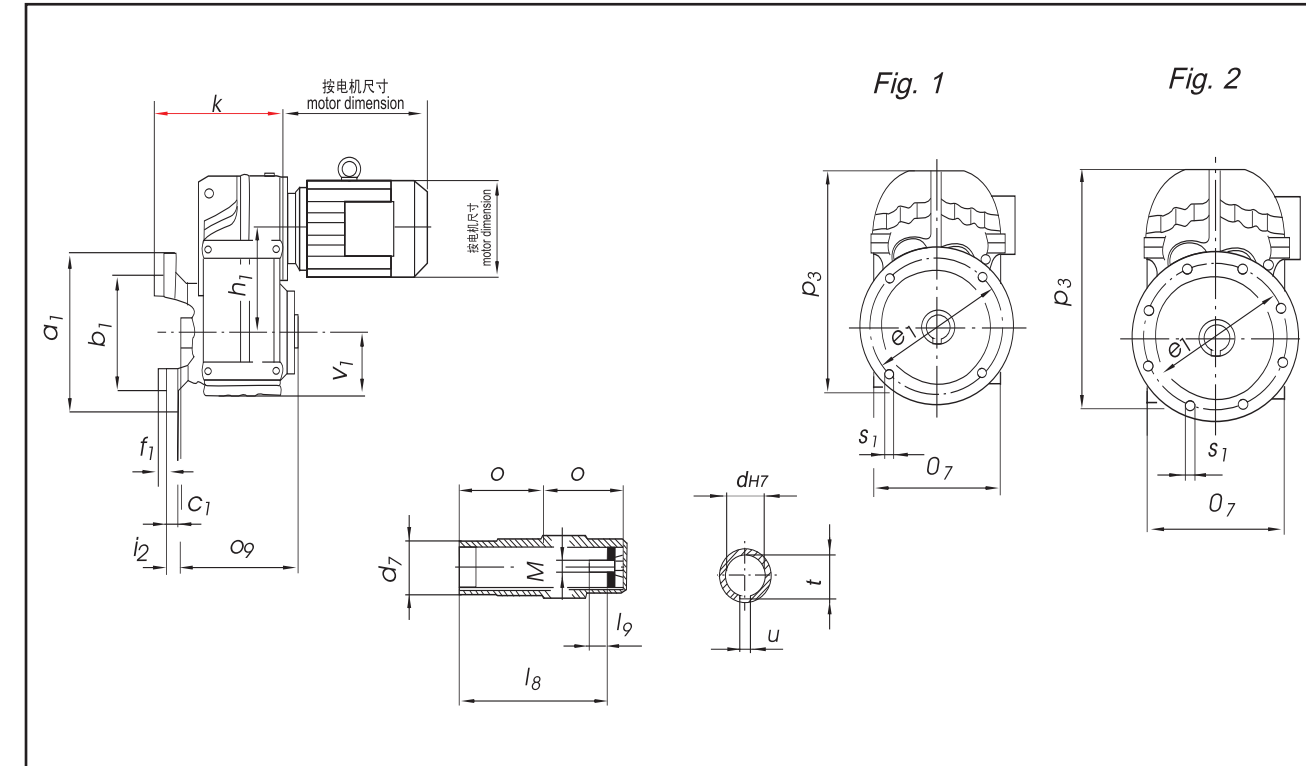

型号 Type	Fig	a ₁	b ₁	c ₁	e ₁	f ₁	h ₁	i ₂	k	o	o ₇	o ₉	p ₃	s ₁	v ₁	d	d ₇	l ₈	l ₉	t	u	M
PAF37	1	160	110	10	130	3.5	112	24	138	60	165	123	252	9	76	30	45	105	17	33.3	8	M10
PAF47	1	200	130	12	165	3.5	128.1	25	162	75	180	153	269	11	77	35	50	132	22	38.3	10	M12
PAF57	1	250	180	15	215	4	136	23.5	177	83	200	170	317	13.5	93	40	55	142	29	43.3	12	M16
PAF67	1	250	180	15	215	4	159.5	23	188	90	212	184	343	13.5	97	40	55	156	29	43.3	12	M16
PAF77	1	300	230	16	265	4	200	37	234	105	270	213	426	13.5	121	50	70	183	32	53.8	14	M16
PAF87	1	350	250	18	300	5	246.7	30	259	120	330	243	531	17.5	152	60	85	210	36	64.4	18	M20
PAF97	2	450	350	22	400	5	285	41.5	321	150	400	303	623	17.5	178	70	95	270	34	74.9	20	M20
PAF107	2	450	350	22	400	5	332.4	41	358	175	450	353	717	17.5	200	90	118	313	40	95.4	25	M24
PAF127	2	550	450	25	500	5	382.6	51	429	205	530	413	856	17.5	236	100	135	373	38	106.4	28	M24
PAF157	2	660	550	28	600	6	447	60	521	250	660	503	1021	22	286	120	155	460	36	127.4	32	M24


注: b₁≤230mm公差是j6, b₁>230mm公差是h6 Note: b₁≤230mm Tolerance j6, b₁>230mm Tolerance h6

P 系列外形安装尺寸

PAF37D17-PAF157D97空心轴法兰安装

P series outline and mounting dimension

PAF37D17-PAF157D97 hollow shaft and flange mounting

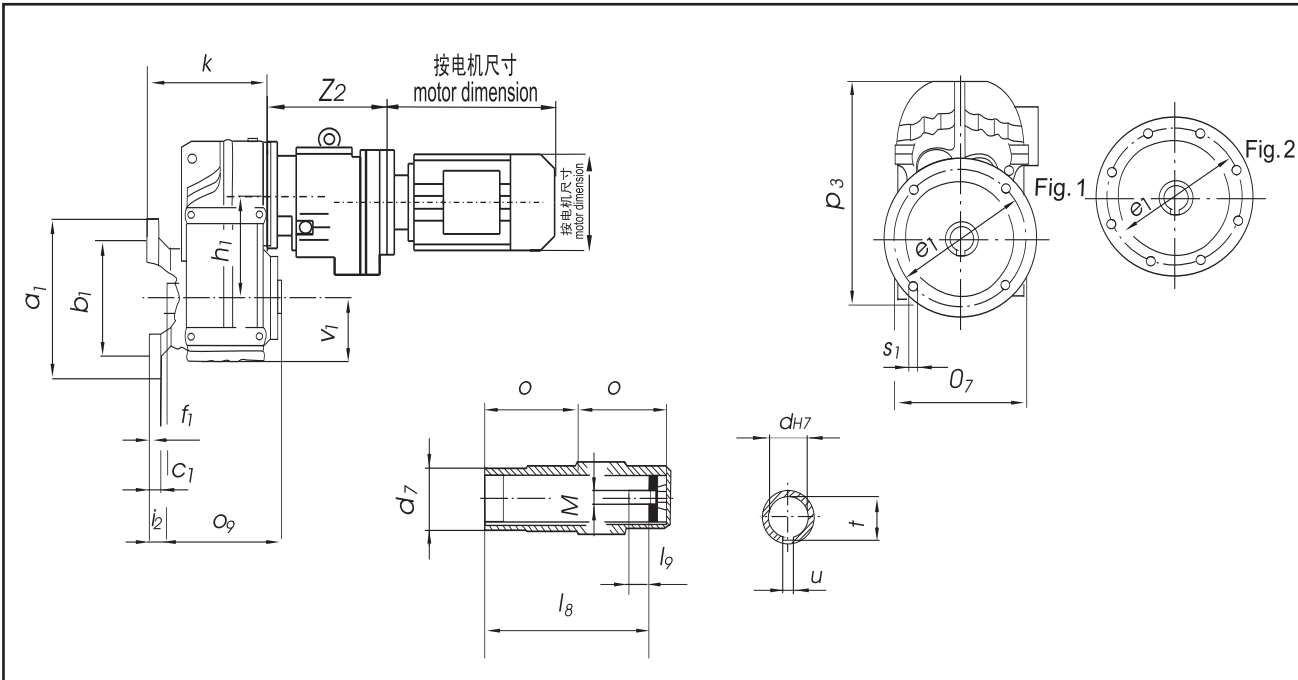

型号 Type	Fig	a ₁	b ₁	c ₁	e ₁	f ₁	h ₁	i ₂	k	o	o ₇	o ₉	p ₃	s ₁	v ₁	v ₂	Z ₂	d	d ₇	l ₈	l ₉	t	u	M
PAF37D17	1	160	110	10	130	3.5	112	24	138	60	165	123	252	9	76	76	175	30	45	105	17	33.3	8	M10
PAF47D17	1	200	130	12	165	3.5	128	25	162	75	180	153	269	11	77	76	175	35	50	132	22	38.3	10	M12
PAF57D37	1	250	180	15	215	4	136	23.5	177	83	200	170	317	13.5	93	94	165	40	55	142	29	43.3	12	M16
PAF67D37	1	250	180	15	215	4	159.5	23	188	90	212	184	343	13.5	97	94	165	40	55	156	29	43.3	12	M16
PAF77D37	1	300	230	16	265	4	200	37	234	105	270	213	426	13.5	121	94	165	50	70	183	32	53.8	14	M16
PAF87D57	1	350	250	18	300	5	246.7	30	259	120	330	243	531	17.5	152	121	190	60	85	210	36	64.4	18	M20
PAF97D57	2	450	350	22	400	5	285	41.5	321	150	400	303	623	17.5	178	121	190	70	95	270	34	74.9	20	M20
PAF107D77	2	450	350	22	400	5	332.4	41	358	175	450	353	717	17.5	200	144	232	90	118	313	40	95.4	25	M24
PAF127D77	2	550	450	25	500	5	382.6	51	429	205	530	413	856	17.5	236	144	232	100	135	373	38	106.4	28	M24
PAF127D87	2	550	450	25	500	5	382.6	51	429	205	530	413	856	17.5	236	184	280	100	135	373	38	106.4	28	M24
PAF157D97	2	660	550	28	600	6	447	60	521	250	660	503	1021	22	286	230	325	120	155	460	36	127.4	32	M24

注: b ≤ 230mm 公差是 j6, b > 230mm 公差是 h6


Note: b ≤ 230mm Tolerance j6, b > 230mm Tolerance h6

P 系列外形安装尺寸

P..S37-157 无电机输入轴

P series outline and mounting dimension

P..S37-157 hollow shaft and flange mounting

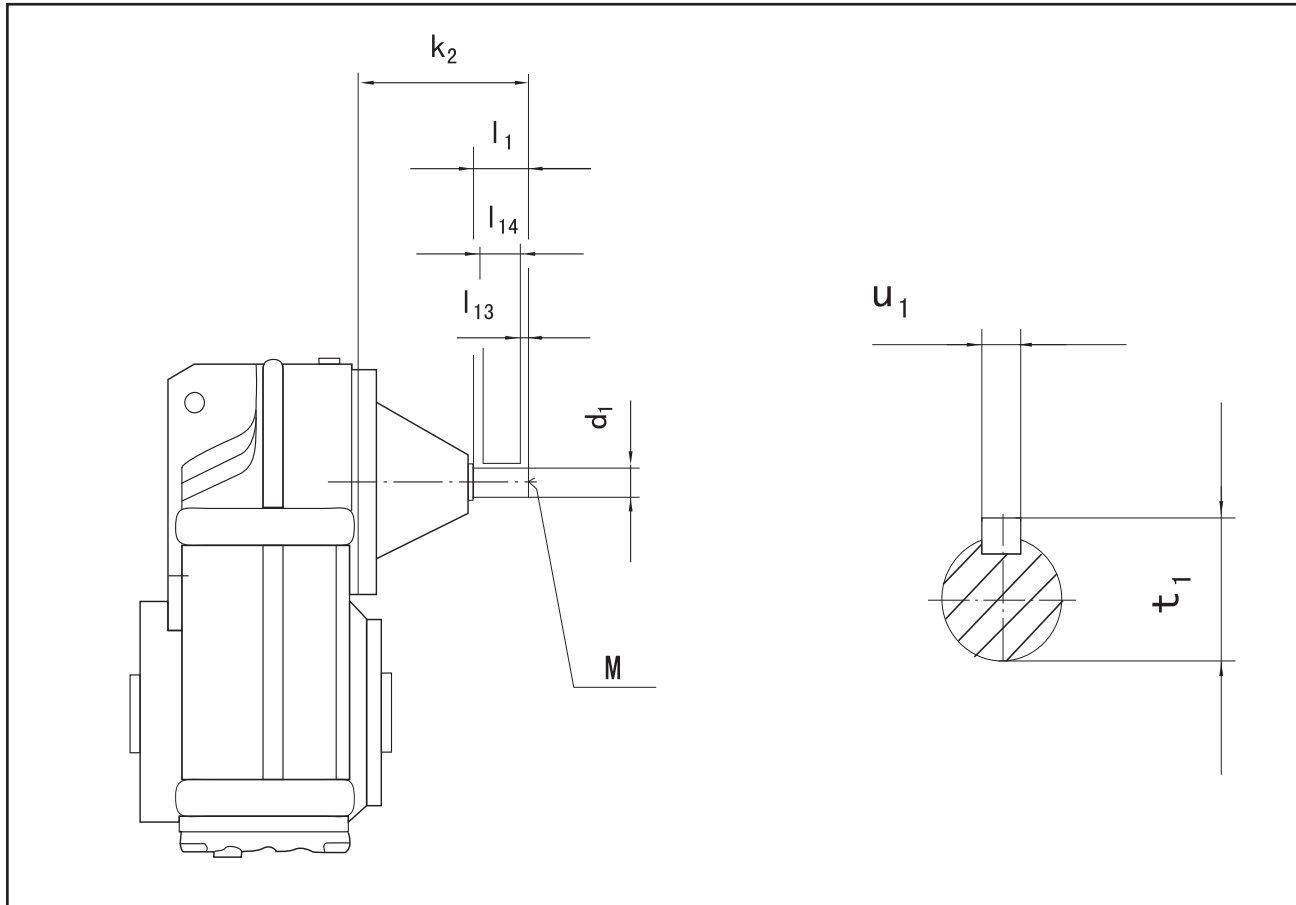

型号 Type	d ₁	k ₂	l ₁	l ₁₃	l ₁₄	t ₁	u ₁	M
P..S37	16	115	40	4	32	18	5	M5
P..S47	16	115	40	4	32	18	5	M5
P..S67	19	120	40	4	32	21.5	6	M6
P..S77	24	140	50	5	40	27	8	M8
P..S87	28	180	60	5	50	31	8	M10
P..S97	38	220	80	5	70	41	10	M12
P..S107	42	270	110	10	70	45	12	M16
P..S127	55	297	110	10	90	59	16	M20


注: P、PAF、PF 型无电机输入轴按照此图外形尺寸。

d₁ ≤ 50mm 公差是 k6, d₁ > 50mm 公差是 m6

Note: P、PAF、PF Type omit input shaft of motor; refer to this figure outline and mounting dimension.

d₁ ≤ 50mm Tolerance k6, d₁ > 50mm Tolerance m6


P 系列外形安装尺寸 P series outline and mounting dimension
PF37D17-PF157D97 法兰安装 PF37D17-PF157D97 flange mounting

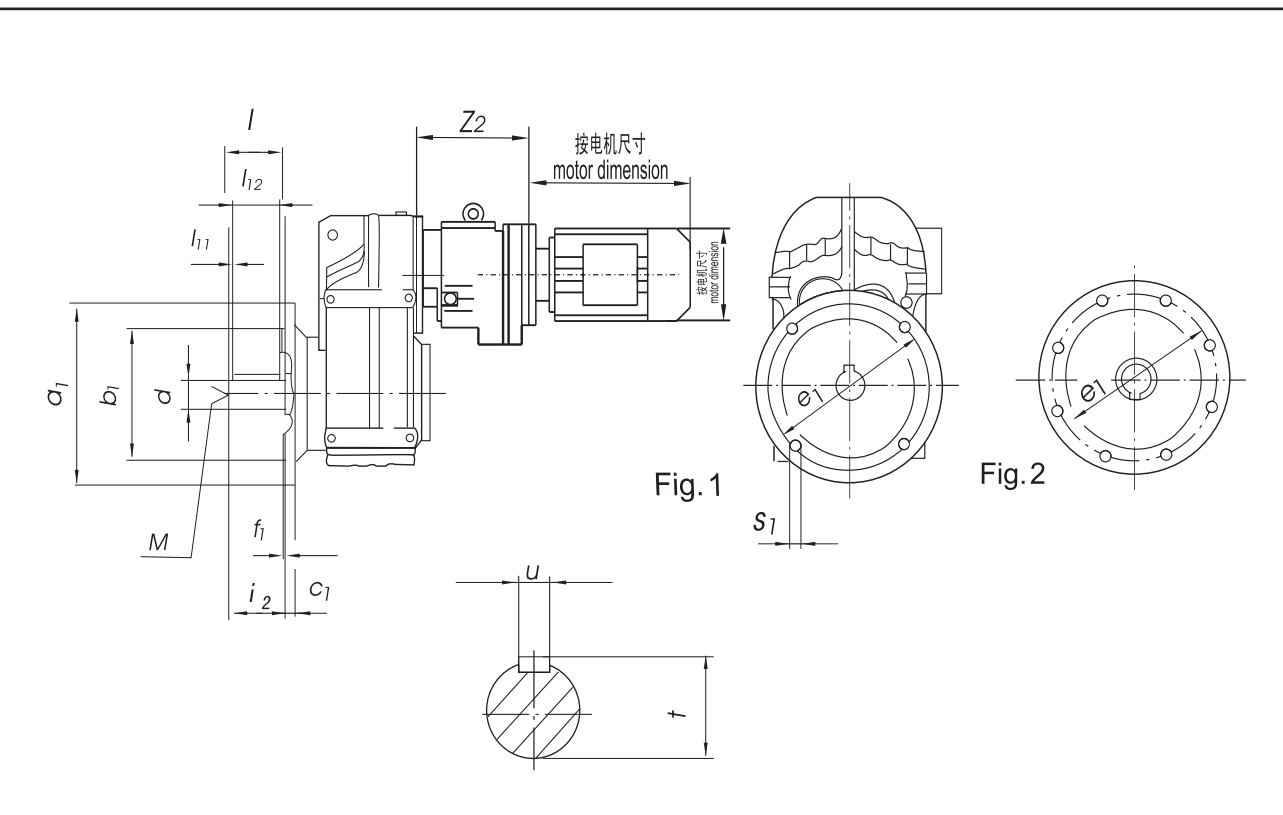

型号 Type	a ₁	Fig	b ₁	c ₁	e ₁	f ₁	i ₂	s ₁	d	Z ₂	l	l ₁₁	l ₁₂	t	u	M
PF37D17	160	1	110	10	130	3.5	50	9	25	175	50	5	40	28	8	M10
PF47D17	200	1	130	12	165	3.5	60	11	30	175	60	3.5	50	33	8	M10
PF57D37	250	1	180	15	215	4	70	13.5	35	165	70	7	56	38	10	M12
PF67D37	250	1	180	15	215	4	80	13.5	40	165	80	5	70	43	12	M16
PF77D37	300	1	230	16	265	4	100	13.5	50	165	100	10	80	53.5	14	M16
PF87D57	350	1	250	18	300	5	120	17.5	60	190	120	5	110	64	18	M20
PF97D57	450	2	350	22	400	5	140	17.5	70	190	140	7.5	125	74.5	20	M20
PF107D77	450	2	350	22	400	5	170	17.5	90	232	170	5	160	95	25	M24
PF127D77	550	2	450	25	500	5	210	17.5	110	232	210	15	180	116	28	M24
PF127D87	550	2	450	25	500	5	210	17.5	110	280	210	15	180	116	28	M24
PF157D97	660	2	550	28	600	6	210	22	120	325	210	5	200	127	32	M24

注: d≤50mm公差是k6, d>50mm公差是m6
b₁≤230mm公差是j6, b₁>230mm公差是h6

P系列外形安装尺寸 P series outline and mounting dimension
P37D17-P157D97 底脚安装 P37D17-P157D97 foot mounting

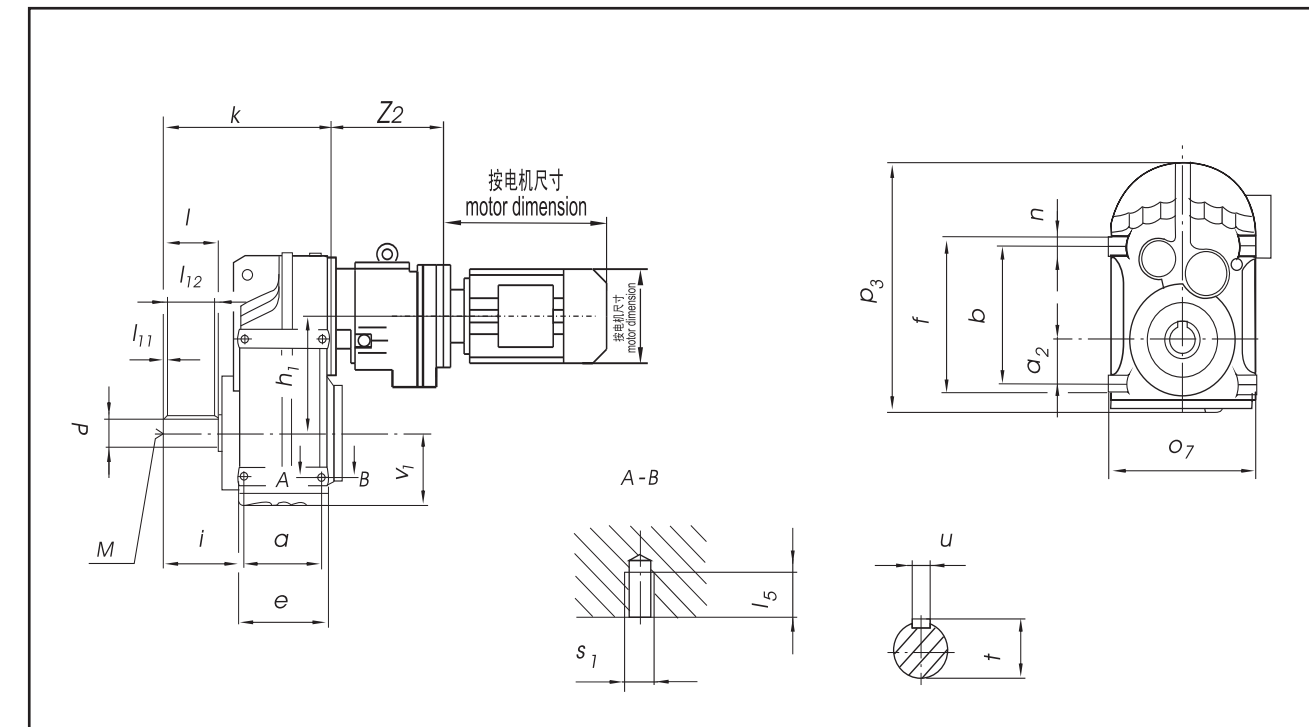

型号 Type	a	a ₂	b	e	f	h ₁	i	k	l ₅	n	O ₇	P ₃	s ₁	v ₁	d	Z ₂	l	l ₁₁	l ₁₂	t	u	M
P37D17	77	31	115	95	135	112	72.5	160	11	20	165	252	M8	76	25	175	50	5	40	28	8	M10
P47D17	93	43	145	109	165	128.1	91	193	15	20	189	269	M10	77	30	175	60	3.5	50	33	8	M10
P57D37	102	55	170	126	195	136	104.5	221	17	25	200	317	M12	93	35	165	70	7	56	38	10	M12
P67D37	112	60	190	131	215	159.5	118	242	17	25	212	343	M12	97	40	165	80	5	70	43	12	M16
P77D37	140	70	240	165	275	200	137.5	294	26	35	270	426	M16	121	50	165	100	10	80	53.5	14	M16
P87D57	165	100	310	195	350	246.7	163	344	26	40	336	531	M16	152	60	190	120	5	110	64	18	M20
P97D57	205	120	350	240	400	285	190.5	416	28	50	400	623	M20	178	70	190	140	7.5	125	74.5	20	M20
P107D77	220	125	400	260	460	332.4	241.5	484	36	60	450	717	M24	200	90	232	170	5	160	95	25	M24
P127D77	270	142	450	316	520	382.6	291	585	45	70	530	856	M30	236	110	232	210	15	180	116	28	M24
P127D87	270	142	450	316	520	382.6	291	585	45	70	530	856	M30	236	110	280	210	15	180	116	28	M24
P157D97	310	170	540	364	620	447	325	662	55	80	660	1021	M36	286	120	325	210	5	200	127	32	M24

注: d≤50mm公差是k6, d>50mm公差是m6

Note: d≤50mm Tolerance k6, d>50mm Tolerance m6